

SEU365ETB



Product family	Cooktop
Installation	Ultra-low profile
Dimensions	36"
Power supply	Electric
Type	Ceramic
EAN code	8017709241001



Aesthetic



Color	Black
Finishing	Glass
Material	Glass
Glass	Ceramic
Glass edge	Beveled
Control setting type	Touch controls
Controls position	Front
Logo	Silkscreened
Silkscreen color	Gray

Program / Functions



No. of ceramic cook zones	5
Cooking zones with Booster	5
Power levels	9
Cooking zones	5

Options



End cooking timer	1	Limited Power	4000 W
End-of-cooking acoustic alarm	Yes	Consumption Mode in W	
		Showroom mode	Yes

Residual time indicator	Yes	Child safety lock	Yes
Limited power consumption option	Yes	Quick start	Yes

Technical Features



Front-left - Ceramic - single - 1.20 kW - Ø 14.8 cm

Rear-left - Ceramic - double - 0.75 - 1.80 kW - Ø 12.4 - Ø 18.4 cm

Center - Ceramic - Triple - 1.05 - 1.95 - 2.70 kW - Ø 15.0 - Ø 21.6 - Ø 28.8 cm

Rear-right - Ceramic - single - 1.80 kW - Ø 18.4 cm

Front-right - Ceramic - single - 1.20 kW - Ø 14.8 cm


Automatic switch-off in case of over-heating

Residual heat indicator

Automatic switch-off in case of overflow

Electrical Connection

Nominal power	8700 W	Electric cable type	Single phase
Current	25 A	Frequency	60 Hz
Voltage	240 V	Power cord length	47 1/4 "
Voltage 2 (V)	208 V	Terminal box	6 poles

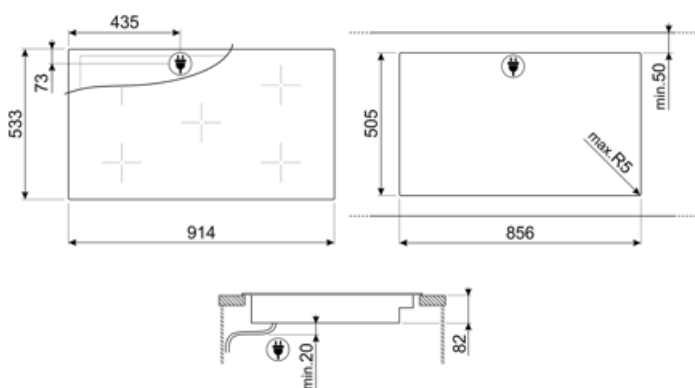













Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Ultra-low profile: Installation of product with flat edge - height of 1 mm.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		Touch control