

# SHU771X

Product family	Hood
Hood Type	Integrated hood
Design	Ceiling
Extraction	Recirculation
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709336509
Aesthetic	Universale
Colour	Stainless steel
Finishing	Satin



## Controls

Control setting	Buttons
-----------------	---------

## Program / Functions

No. of speeds	3
Intensive speed	

## Technical Features



No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Stainless steel
Light Power	1,1 W	Vent outlet	150 mm
Light color temperature scale (K)	4000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	780 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	600 mm
Motor power	250 W		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	300	46
Speed 2	450	55
Speed 3	630	62


Intensive speed	750	66
-----------------	-----	----

## Accessories Included

Tube reduction Yes

## Electrical Connection

Electrical connection rating	252 W	Frequency (Hz)	50-60 Hz
Current	10 A	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	(I) Australia

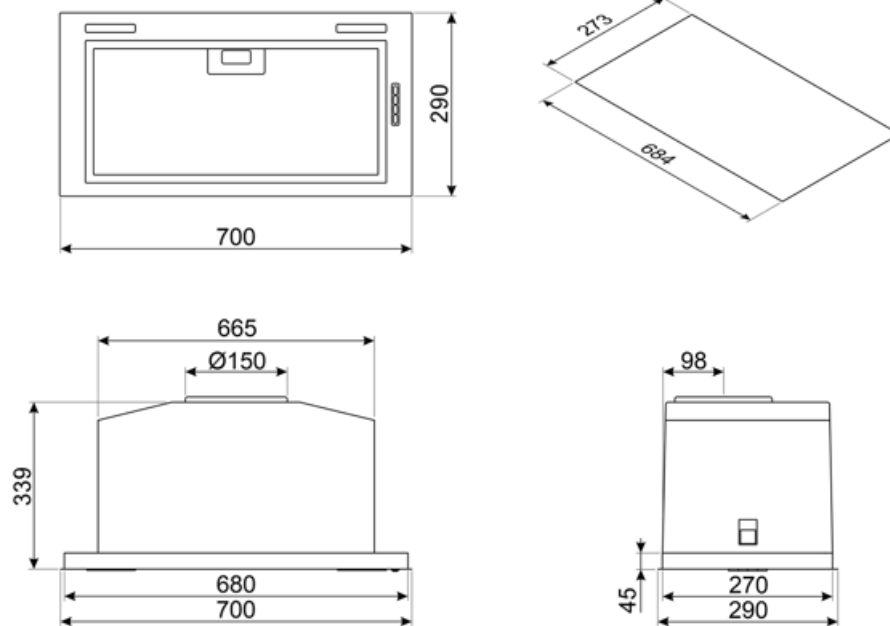

## Compatible Accessories

---

KITFC152

Charcoal filters Round Kit 2 pieces



---

## Symbols glossary

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**Intensive/turbo setting:** when extra fast extraction is required.