

SHU771X

Product family

Hood

Hood Type

Integrated hood

Design

Ceiling

Extraction

Recirculation

Material

Stainless steel

Type of steel

Brushed

EAN code

8017709336509

Aesthetic

Universale

Colour

Stainless steel

Finishing

Satin



Controls

Control setting

Buttons

Program / Functions

No. of speeds

3

Intensive speed



Technical Features



No. of lights

2

No. of filters

2

Light type

LED

Anti-grease filters

Stainless steel

Light Power

1,1 W

Vent outlet

150 mm

Light color temperature scale (K)

4000 K
780 m³/h

Minimum distance from GAS hob

650 mm
600 mm

Free outlet maximum capacity

250 W

Minimum distance from ELECTRIC hob

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
--	---	----------------------------------

Speed 1	300	46
Speed 2	450	55
Speed 3	630	62





Intensive speed	750	66
-----------------	-----	----

Accessories Included

Tube reduction Yes

Electrical Connection

Electrical connection rating	252 W	Frequency (Hz)	50-60 Hz
Current	10 A	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	(I) Australia

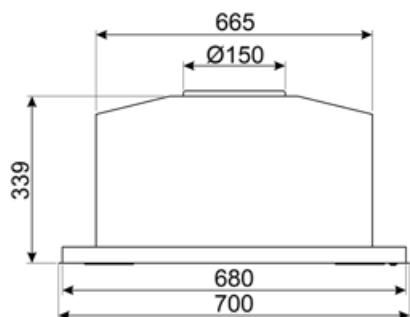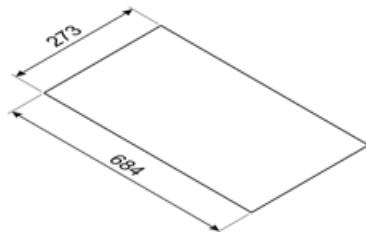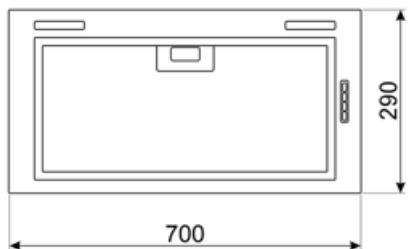



Compatible Accessories

KITFC152

Charcoal filters Round Kit 2 pieces



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.