

SHU971X

Product family

Hood

Hood Type

Integrated hood

Design

Ceiling

Extraction

Recirculation

Material

Stainless steel

Type of steel

Brushed

EAN code

8017709336516

Aesthetic

Universale

Colour

Stainless steel

Finishing

Satin



Controls

Control setting

Buttons

Program / Functions

No. of speeds

3

Intensive speed



Technical Features



No. of lights

2

No. of filters

3

Light type

LED

Anti-grease filters

Stainless steel

Light Power

1,1 W

Vent outlet

150 mm

Light color temperature scale (K)

4000 K
780 m³/h

Minimum distance from GAS hob

650 mm
600 mm

Free outlet maximum capacity

250 W

Minimum distance from ELECTRIC hob

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|---------|---|----------------------------------|
| Speed 1 | 300 | 46 |
| Speed 2 | 450 | 55 |
| Speed 3 | 630 | 62 |





| | | |
|-----------------|-----|----|
| Intensive speed | 750 | 66 |
|-----------------|-----|----|

Accessories Included

Tube reduction Yes

Electrical Connection

| | | | |
|-------------------------------------|-----------|----------------------------------|---------------|
| Electrical connection rating | 252 W | Frequency (Hz) | 50-60 Hz |
| Current | 10 A | Power supply cable length | 1500 mm |
| Voltage | 220-240 V | Plug | (I) Australia |

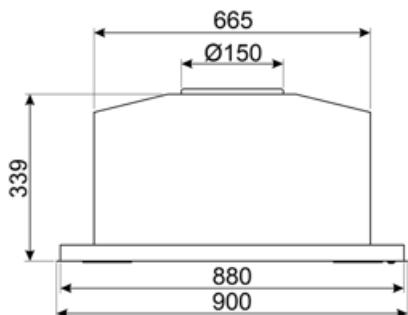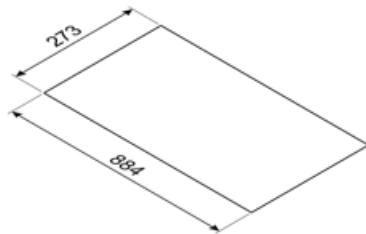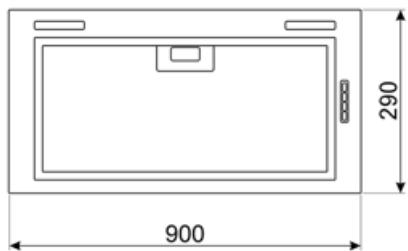



Compatible Accessories

KITFC152

Charcoal filters Round Kit 2 pieces



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.