# SI1M24744D

| | |
|---|---|
| **Product Family** | Hob |
| **Built-in** | Ultra-low profile or Fully Flushed |
| **Dimensions** | 70/75 cm |
| **Power supply** | Electric |
| **Type** | Induction |
| **EAN code** | 8017709361822 |



## Aesthetics

| | |
|---|---|
| **Aesthetics** | Musa |
| **Colour** | Black |
| **Finishing** | Glass |
| **Material** | Glass |
| **Glass Type** | Ceramic |
| **Glass edge** | Straight edge |
| **Gas_replacement** | Yes |
| **Type of control setting** | Compact EVO Slider |
| **Slider** | Yes |
| **Slider** | Red |
| **Control knobs position** | Front |
| **Logo** | Silk screen |
| **Serigraphy colour** | Grey |

## Program / Functions

| | |
|---|---|
| **No. of induction cook zones** | 4 |
| **Time-setting options** | Automatic switch-off |
| **No. of cooking zones with booster** | 4 |
| **No. of Flexible zones** | 1 |
| **Main on/off switch** | Yes |
| **Power levels** | 9 |
| **Auto-Vent 2.0** | Yes |
| **Total no. of cook zones** | 4 |

## Options



| | |
|---|---|
| **Multizone Option** | Yes |
| **Flexible Zone Type** | MultiZone |
| **Standard cut out** | 478-482x555-560 mm |
| **Double Booster** | Yes |
| **Keep warm automatic function** | Yes |
| **Grill function** | Yes |
| **End cooking timer** | 4 |
| **Pause option** | Yes |
| **Minute minder** | 1 |
| **End of cooking acoustic alarm** | Yes |
| **Residual time indicator** | Yes |
| **Limited Power Consumption Mode** | Yes advance |
| **Limited Power Consumption Mode in W** | 2400 a 7400 - step 100 W |
| **Show Room Demo Option** | Yes |
| **Control Lock / Child Safety** | Yes |
| **Cleaning option** | Yes |
| **Quick start** | Yes |
| **Rapid level selection** | Yes |

## Technical Features

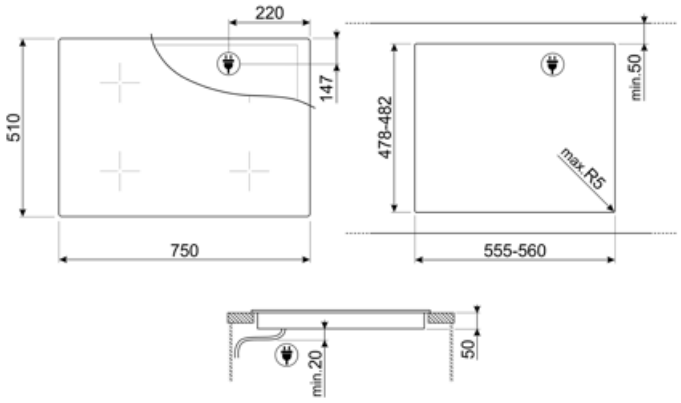


Front left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 21.8x18.0 cm
Rear left - Induction - multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 21.8x18.0 cm
Rear right - Induction - single - 2.30 kW - Booster 3.00 kW - Double booster 3.00 kW - - Ø 21.0 cm
Front right - Induction - single - 1.40 kW - Booster 2.10 kW - Double booster 2.10 kW - - Ø 16.0 cm
Multizone left - Booster 3.70 kW - 38.5x23.0 cm

| | |
|---|---|
| **Automatic setting according to pan dimension** | Yes |
| **Automatic pan detection** | Yes, min 9 cm |
| **Permanent Automatic Pot Detection with indication of the relative control** | Yes |
| **Minimum pan diameter indication** | Yes |
| **Automatic switch off when overheat** | Yes |
| **Automatic switch off when overflow** | Yes |
| **Residual heat indicator** | Yes |
| **Eco-Heat** | Yes |
| **Protection against accidental start up** | Yes |

## Electrical Connection

| | |
|---|---|
| **Nominal power (W)** | 7400 W |
| **Current** | 33 A |
| **Voltage (V)** | 220-240 V |
| **Voltage 2 (V)** | 380-415 V |
| **Type of electric cable** | Single phase |
| **Type of electric cable** | Yes, Double and Three Phase |
| **Frequency (Hz)** | 50/60 Hz |
| **Power supply cable length** | 120 cm |
| **Terminal Box** | 5 poles |
| **Plug** | No |


220
147
510
750
478-482
min.50
max.R5
555-560
min.20
50

## Compatible Accessories



**GRILLPLATE**

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



**TPKPLATE**

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



**SCRP**

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary



Permanent auto pot detection



Power booster: option allows the zone to work at full power when very intense cooking is necessary.




Compact Slider back-lighted ghost effect




CUT_OUT_STANDARD_72dpi




Eco-Heat: this function warns when the zone is still hot after being switched off. As well as ensuring maximum safety by preventing burns, this also allows you to make use of residual heat to continue cooking or keep foods hot.



Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



PAUSE_72dpi




Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Connection between hob and hood



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.




Additional maximum power level for a better energy consumption



Grill function




Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility




Min diameter pot detection of 9 cm




Possibility to set the maximum power absorbion of the hob



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Time elapsed: shows how long the cooking zone has been in use.