

SI1M4744D



Product Family

Built-in type

Dimensions

Power supply

Type

EAN code

Hob

Ultra-low profile or Fully Flushed

70/75 cm

Electric

Induction

8017709305628



Aesthetics



Aesthetic

Colour

Finishing

Material

Glass type

Glass edge

Type of control setting

Slider

LED colours

Control knob position

Logo

Serigraphy colour

Classica

Black

Glass

Glass

Ceramic

Straight edge

Compact Slider Plus

Yes

Red

Front

Silk screen

Grey

Program / Functions



No. of induction cook zones

Time-setting options

No. of cooking zones with booster

No. of Flexible zones

Main on/off switch

Power levels

Auto-vent 2.0

Total no. of cook zones

4

Spegnimento automatico

4

1

Yes

9

Yes


4

Options



| | | | |
|-------------------------------------|--------------------|------------------------------------|--------------------------|
| Multizone Option | Yes | Residual time indicator | Yes |
| Flexible Zone Type | MultiZone | Limited Power | Si Advance |
| Worktop Cut-Out | 478-482x555-560 mm | Consumption Mode | |
| Double Booster | Yes | Limited Power | 2400 a 7400 - step 100 W |
| Keep warm automatic function | Yes | Consumption Mode in W | |
| Grill function | Yes | Showroom Demo Option | Yes |
| End cooking timer | 4 | Control Lock / Child Safety | Yes |
| Pause option | Yes | Bridge option | Yes |
| Minute minder | 1 | Cleaning option | Yes |
| End of cooking alarm | Yes | Quick start | Yes |
| | | Rapid level selection | Yes |

Technical Features




Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 2.50 kW - 21.8x18.0 cm
 Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 21.8x18.0 cm
 Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Double booster 3.00 kW - - Ø 21.0 cm
 Front-right - Induction - Single - 1.40 kW - Booster 2.10 kW - - Ø 16.0 cm
 Multizone left - Booster 3.70 kW - 38.5x23.0 cm

| | | | |
|--|----------------|---|-----|
| Automatic setting according to pan dimension | Yes | Automatic switch off when overflow | Yes |
| pan detection | Yes, min. 7 cm | Residual heat indicator | Yes |
| Permanent Automatic Pot Detection with indication of the relative control | Yes | Eco-Heat | Yes |
| Minimum pan diameter indication | Yes | Protection against accidental start up | Yes |
| Automatic switch off when overheat | Yes | | |

Electrical Connection

| | | | |
|---|-------------------|---|-----------------------------|
| Electrical connection rating (W) | 7400 W | Additional connection modalities | Yes, Double and Three Phase |
| Current | 33 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 120 cm |
| Voltage 2 (V) | 380-415 V | Terminal box | 5 poles |
| Type of electric cable installed | Yes, Single phase | Plug | Not present |

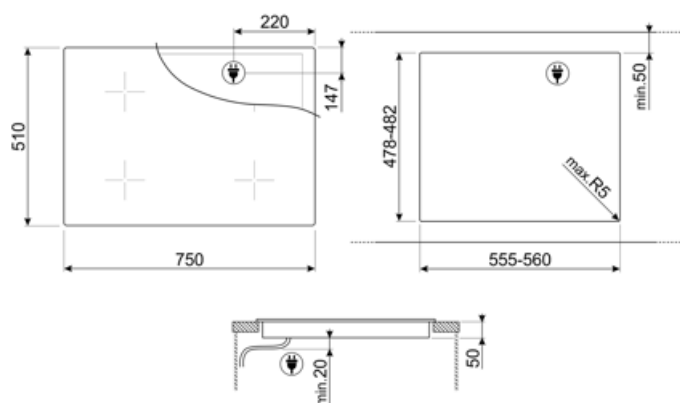

Compatible Accessories



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



TPKPLATE

























Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

| | | | |
|--|---|---|---|
|  | Permanent auto pot detection |  | Connection between hob and hood |
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |
|  | Compact Slider back-lighted ghost effect |  | The slider control panel allows you to adjust the power simply by passing your finger across the touch device. |
|  | CUT_OUT_STANDARD_72dpi |  | Additional maximum power level for a better energy consumption |
|  | Eco-Heat: this function warns when the zone is still hot after being switched off. As well as ensuring maximum safety by preventing burns, this also allows you to make use of residual heat to continue cooking or keep foods hot. |  | Grill function |
|  | This function allows you to keep cooked food warm without burner it |  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |
|  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |  | Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility |
|  | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids. |  | All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated. |
|  | Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth). |  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Time elapsed: shows how long the cooking zone has been in use. |
|  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |  | TWIN_ZONE_72dpi |
|  | Min diameter pot detection of 7 cm. |  | Possibility to set the maximum power absorbion of the hob. |