# SI1M4844D

| | |
|---|---|
| **Product Family** | Hob |
| **Built-in type** | Ultra-low profile or Fully Flushed |
| **Dimensions** | 80 cm |
| **Power supply** | Electric |
| **Type** | Induction |
| **EAN code** | 8017709305642 |

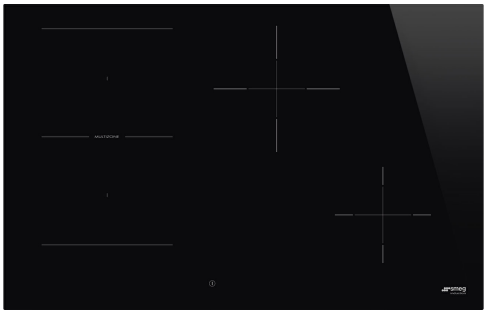

## Aesthetics

| | |
|---|---|
| **Aesthetic** | Classica |
| **Colour** | Black |
| **Acabamento** | Glass |
| **Material** | Glass |
| **Glass type** | Ceramic |
| **Glass edge** | Straight edge |
| **Glass on Steel** | No |
| **Frame** | No |
| **Type of control setting** | Deslizador Compacto Plus |
| **Slider** | Yes |
| **Comandos Slider** | Vermelho |
| **Control knob position** | Front |
| **Serigraphy colour** | Grey |
| **Alternative colours available** | No |

## Program / Functions

| | |
|---|---|
| **No. of induction cook zones** | 4 |
| **Time-setting options** | Spegnimento automatico |
| **No. of cooking zones with booster** | 4 |
| **No. of Flexible zones** | 1 |
| **Main on/off switch** | Yes |
| **Power levels** | 9 |
| **Ventilação automática 2.0** | Sim |

| | |
|---|---|
| **Total no. of cook zones** | 4 |

## Options

| | | | |
|---|---|---|---|
| **Multizone Option** | Yes | **Minute minder** | 1 |
| **Tipo de zona flexível** | MultiZone | **End of cooking alarm** | Yes |
| **Corte padrão** | 480x730 mm | **Residual time indicator** | Yes |
| **Opção de MultiZona** | Sim | **Limited Power Consumption Mode** | Sim Adiantamento |
| **Opção de MultiZona** | Sim | **Limited Power Consumption Mode in W** | 2400 a 7400 - step 100 W |
| **Auto-boiling Function** | No | **Showroom Demo Option** | Yes |
| **Simmering Function** | No | **Control Lock / Child Safety** | Yes |
| **Keep warm automatic function** | Yes | **Bridge option** | Yes |
| **Função de grelha** | Yes | **Cleaning option** | Yes |
| **Melting/Low temperature cooking function** | No | **Quick start** | Yes |
| **End cooking timer** | 4 | **Rapid level selection** | Yes |
| **Pause option** | Yes | | |

## Technical Features

Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - 21.8x18.0 cm

Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 21.8x18.0 cm

Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Double booster 3.00 kW - - Ø 21.0 cm

Front-right - Induction - Single - 1.40 kW - Booster 2.10 kW - - Ø 16.0 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm

| | | | |
|---|---|---|---|
| **Automatic setting according to pan dimension** | Yes | **Automatic switch off when overflow** | Yes |
| **pan detection** | Sim, mín. 7 cm | **Residual heat indicator** | Yes |
| **Detecção Automática Permanente de Pote com indicação do controle relativo** | Yes | **Aquecimento Ecológico** | Yes |
| **Minimum pan diameter indication** | Yes | **Protection against accidental start up** | Yes |
| **Automatic switch off when overheat** | Yes | | |

## Accessories Included

| | |
|---|---|
| **Other accessories** | No |

## Electrical Connection

| | |
|---|---|
| **Plug** | No |

| | | | |
|---|---|---|---|
| **Electrical connection rating (W)** | 7400 W | **Type of electric cable** | Yes, Double and Three Phase |
| **Current** | 33 A | **Type of electric cable supplied** | No |
| **Voltage (V)** | 220-240 V | **Frequency (Hz)** | 50/60 Hz |
| **Voltage 2 (V)** | 380-415 V | **Comprimento do cabo de alimentação** | 120 cm |
| **Type of electric cable** | Single phase | **Placa de bornes** | 5 polos |
| | | **Ficha elétrica** | No |

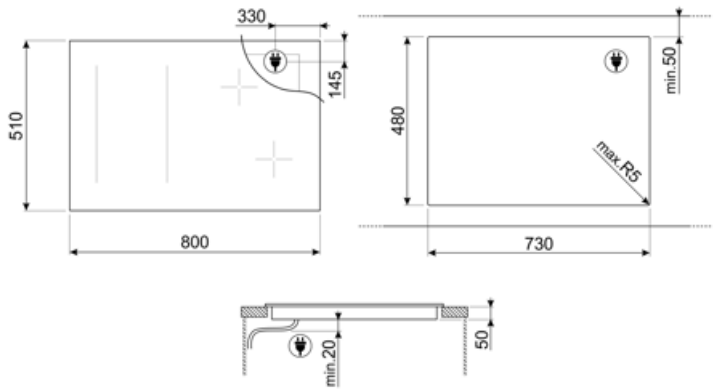

## Compatible Accessories

**GRILLPLATE**

Placa de rede universal para indução, gás, cerâmica e fogões elétricos. Superfície antiaderente ideal para cozinhar carne, queijo e vegetais. Dimensões: 410 x 240 mm.

**TPKPLATE**

Placa universal para placas de indução, gás, cerâmica e fogões elétricos. Superfície antiaderente ideal para cozinhar peixe, ovos e vegetais. Dimensões: 410 X 240 mm.

**SCRP**

Placas de indução e de cerâmica e raspador teppanyaki

## Symbols glossary

Fusão automática de zonas para uma área maior

Impulsionador de potência: opção permite que a zona funcione em potência máxima quando é necessário cozinhar muito intensamente.

O painel de controle deslizante permite-lhe ajustar a potência simplesmente passando o dedo pelo dispositivo táctil.

Mantenha a função quente: Mantenha a função quente mantém o alimento cozido aquecido. Neste modo, a zona de aquecimento funciona a uma capacidade mínima de 120 minutos e, em seguida, desliga-se automaticamente.

Indução: O trabalho destas placas baseia-se no princípio da indução electromagnética. O calor é gerado diretamente na parte inferior da panela durante o seu contato com a placa.

Ligação entre a placa e o exaustor

Proteção especial contra transbordamento: A proteção especial contra transbordamento desliga o fogão na presença de transbordamento de líquidos.

Seleção rápida, com um toque de cozimento começa no nível mais alto, em seguida, reduz automaticamente após o tempo. Ideal para pratos que exigem fervura rápida e, em seguida, cozimento contínuo sem controle constante (por exemplo, caldo de carne).

Indicação de calor residual: Depois de a placa de cerâmica de vidro ter sido desligada, o indicador de calor residual mostra qual das zonas de aquecimento ainda permanece quente. Quando a temperatura cai abaixo de 60°C, o indicador se apaga.

Temporizador: Todas as placas de cerâmica têm um temporizador que termina automaticamente o cozimento após um tempo predefinido.

Função de grelha

Detecção de pote automático permanente

Bloqueio para crianças: alguns modelos estão equipados com um dispositivo para bloquear o programa/ciclo para que não possa ser acidentalmente alterado.

Aquecimento Ecológico: esta função avisa quando a zona ainda está quente depois de ser desligada. Além de garantir a máxima segurança, evitando queimaduras, isso também lhe permite fazer uso de calor residual para continuar cozinhando ou manter os alimentos quentes.

Protecção contra o sobreaquecimento: O sistema de segurança que desliga automaticamente a placa em caso de sobreaquecimento da unidade de controle.

Multizona: permite que várias panelas sejam usadas ao mesmo tempo, grandes ou pequenas, oferecendo liberdade de colocação e maior flexibilidade

Efeito fantasma de retro-iluminação do slide compacto

PAUSE_72dpi

Função de arranque rápido: a temperatura escolhida é atingida mais rapidamente. O elemento de aquecimento funciona na potência máxima até que a temperatura certa seja atingida.

Tempo decorrido: mostra há quanto tempo a zona de cozedura está em uso.

TWIN_ZONE_72dpi

Detecção de pote de diâmetro mínimo de 7 cm

Possibilidade de definir a absorção máxima de potência da placa

Nível máximo adicional de potência para um melhor consumo de energia

# Benefit (TT)

**Induction hobs**

Fast cooking and precise temperature control

**Glass**

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

**Ceramic**

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

**Control knob position frontal**

Instant and intuitive control thanks to front controls, easily accessible for practical use.

**Keep Warm function**

Dishes always served at the right temperature, even after cooking, thanks to the Keep Warm function

Nine power levels and Boost function for optimal cooking performance

**MultiZone**

Large surface created by joining two contiguous zones, perfect for large dishes

In addition to their sleek aesthetics and contemporary design, Smeg induction hobs are equipped with innovative technologies. The Multizone function guarantees maximum flexibility in the use of the hob and endless cooking possibilities, expanding the cooking area to suit the shape and size of different pans

**Grill function**

Even heat distribution with the grill function, requiring just two minutes of preheating for perfectly grilled dish

**Permanent Automatic Pot Detection with indication of the relative control**

Automatic activation of the correct cooking zone with Autopot Detection, recognizing the pot without user intervention

**Auto-vent 2.0**

Cooktop and hood connected via Bluetooth for synchronized and automatic operation