

SI1M4954D




Product Family Hob

Built-in type Ultra-low profile or Fully Flushed

Dimensions90 cmPower supplyElectricTypeInduction

EAN code 8017709305666

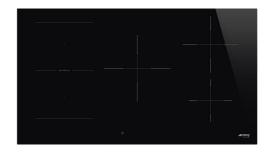

Aesthetics





AestheticClassicColourBlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeStraight edgeType of control settingCompact EVO Slider

SliderYesSliderRedControl knob positionFrontSerigraphy colourGrey

Program / Functions





No. of induction cook zones

Time-setting options Automatic Shutdown

No. of cooking zones with booster 5
No. of Flexible zones 1

Main on/off switch

Power levels

Auto-vent 2.0

Total no. of cook zones

Yes

9

Sì

Total solution of cook zones



Options





















Flexible Zone Type MultiZone

Standard cut out **Multizone Option** Yes

Multizone Option Yes Keep warm automatic Yes function

Grill function End cooking timer 5 Pause option Yes

482-486x839-844 mm

Yes

Minute minder

End of cooking alarm Yes Residual time indicator Yes

Limited Power Advanced Eco Logic

Consumption Mode

Limited Power 2400 a 7400 - step 100 W

Yes

Consumption Mode in W Showroom Demo Option Yes Control Lock / Child Yes

Safety

Bridge option Yes Cleaning option Yes Quick start Yes Rapid level selection Yes

Technical Features













Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 22.0x18.0 cm

Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 22.0x18.0 cm

Central - Induction - Single - 2.30 kW - Booster 3.00 kW - - Ø 25.0 cm

Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - - Ø 21.0 cm Front-right - Induction - Single - 1.40 kW - Booster 2.10 kW - - Ø 15.0 cm

Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - 20 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm

Automatic setting according to pan

dimension

pan detection Yes, min 7 cm

Permanent Automatic Pot Detection with indication of the relative

control

Automatic switch off when overheat

Yes

Yes

Yes

Automatic switch off

when overflow

Residual heat indicator Yes Eco-Heat Yes **Protection against** Yes

accidental start up

Electrical Connection

Electrical connection 7400 W


rating (W)

Current 33 A Voltage (V) 220-240 V 380-415 V Voltage 2 (V) Type of electric cable Single phase Type of electric cable Double phase 50/60 Hz Frequency (Hz) Power supply cable 120 cm

length

Terminal box 5 poles



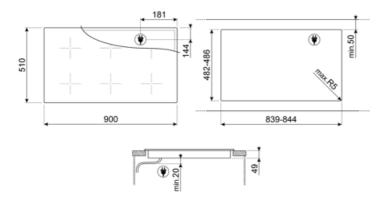



Compatible Accessories

GRILLPLATE



Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

TPKPLATE



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Induction and ceramic hobs and teppanyaki scraper




Symbols glossary

O	Automatic merge of zones for a bigger area
☆	



Power booster: option allows the zone to work at full power when very intense cooking is necessary.






Compact Slider back-lighted ghost effect

The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Additional maximum power level for a better energy consumption





∄| ·

Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.

Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.

÷ Ö

Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility

Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



PAUSE_72dpi

Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.

Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.

()

Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



TWIN_ZONE_72dpi

7cm min

•••

logic