
SI1M4954D

Product familie	Kookplaat
Type	Standaard opbouw of vlakbouw
Afmeting	90 cm
Voeding	Elektrisch
Type	Inductie
EAN-code	8017709305666

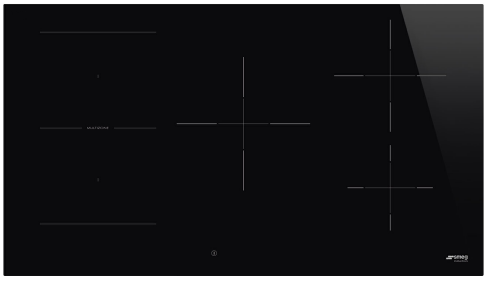

Design

Design	Classici
Kleur	Zwart
Afwerking	Glas
Materiaal	Glas
Type glas	Keramisch
Glazen rand	Rechte rand
Bediening	Compact Slider Plus
Slider bediening	Ja
Kleur LED	Rood
Positie bediening	Vooraan
Logo	Geëtst
Kleur serigrafie	Grijs

Program / Functions

Aantal inductiekookzones	5
Opties tijdprogrammering	Automatische uitschakeling
Aantal kookzones met booster	5
Aantal Multizones	1
Hoofdtoets aan/uit	Ja
Vermogenniveaus	9
Auto-Vent 2.0	Ja
Totaal aantal kookzones	5

Opties



Multizone	Ja	**Resttijd indicator**	Ja
Flexible Zone Type	MultiZone	**ECO-Logic optie**	Si Advance
Worktop Cut-Out	482-486x839-844 mm	**Beperkt vermogensverbruik**	2400 a 7400 - step 100 W
Auto Multizone	Ja	**Showroom demo optie**	Ja
Warmhoudfunctie	Ja	**Kinderbeveiliging**	Ja
Grill functie	Ja	**TwinZone optie**	Ja
Automatische uitschakeling	5	**Optie Toetsblokkering t.b.v. reininging**	Ja
Pauze optie	Ja	**Quick start**	Ja
Timer	1	**Snelle selectie niveaus**	Ja
Geluidssignaal einde kooktijd	Ja		

Technische specificaties




Linksvoor - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 22.0x18.0 cm
Linksachter - Inductie - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 22.0x18.0 cm
Midden - Inductie - enkel - 2.30 kW - Booster 3.00 kW - Double booster 3.00 kW - - Ø 25.0 cm
Rechtsachter - Inductie - enkel - 2.30 kW - Booster 3.00 kW - Double booster 3.00 kW - - Ø 21.0 cm
Rechtsvoor - Inductie - enkel - 1.40 kW - Booster 2.10 kW - Double booster 2.10 kW - - Ø 15.0 cm
Multizone left - Booster 3.70 kW - 38.5x23.0 cm

Automatische aanpassing panafmeting	Ja	**Automatisch uitschakelen i.g.v. overkoken**	Ja
Automatische panherkenning	Ja, min. 7 cm	**Restwarmte indicator**	Ja
Permanente automatische pot herkenning met indicatie op de bediening	Ja	**Eco-Heat**	Ja
Automatisch uitschakelen i.g.v. oververhitting	Ja	**Beveiliging tegen accidentele inschakeling**	Ja

Elektrische aansluiting

Nominale aansluitwaarde	7400 W	**Type of electric cable supplied**	No
Stroom	33 A	**Frequentie**	50/60 Hz
Spanning (V)	220-240 V	**Lengte voedingskabel**	120 cm
Spanning 2 (V)	380-415 V	**Aansluiting**	5 polig
Type stroomkabel	Eenfasig	**Stekker**	Nee
Type stroomkabel	Tweefasig		

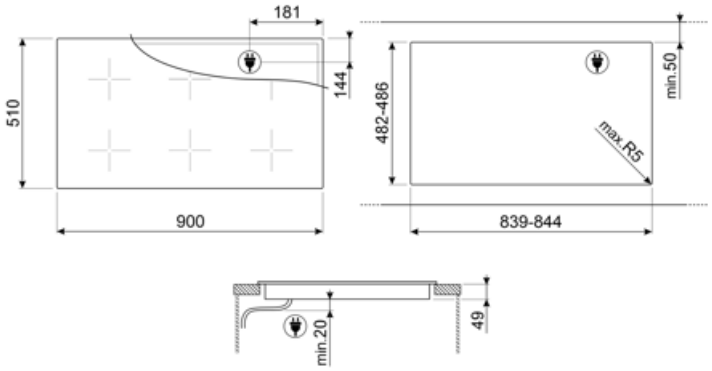
181
144
510
900
482-486
min.50
max.R5
839-844
min.20
49

Compatible Accessories



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Schraper voor inductie- en vitrokeramische kookplaten

Symbols glossary



Permanent auto pot detection



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Compact Slider back-lighted ghost effect



Additional maximum power level for a better energy consumption



Grill functie



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Multizone: maakt het mogelijk meerdere pannen tegelijk te gebruiken, groot of klein, voor meer plaatsingsvrijheid en meer flexibiliteit



Min diameter pot detection of 7 cm.



Possibility to set the maximum power absorbion of the hob.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Time elapsed: shows how long the cooking zone has been in use.



TWIN_ZONE_72dpi



Connection between hob and hood



Sommige modellen zijn voorzien van een functie om het programma/de cyclus te blokkeren zodat het niet per ongeluk kan aangepast worden.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Eco-Heat: this function warns when the zone is still hot after being switched off. As well as ensuring maximum safety by preventing burns, this also allows you to make use of residual heat to continue cooking or keep foods hot.



This function allows you to keep cooked food warm without burner it



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.