


# SI2321D



|                |                                    |
|----------------|------------------------------------|
| Product Family | Hob                                |
| Built-in type  | Ultra-low profile or Fully Flushed |
| Dimensions     | 30 cm                              |
| Power supply   | Electric                           |
| Type           | Induction                          |
| EAN code       | 8017709330644                      |

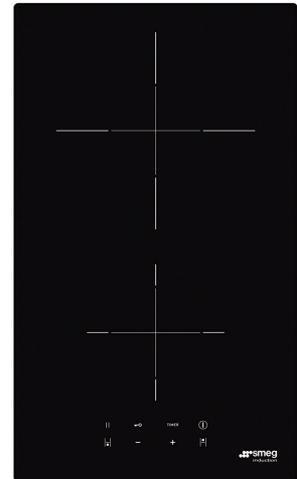

## Aesthetics



|                         |               |
|-------------------------|---------------|
| Aesthetic               | Universale    |
| Colour                  | Black         |
| Finishing               | Glass         |
| Material                | Glass         |
| Glass type              | Ceramic       |
| Glass edge              | Straight edge |
| Type of control setting | Digi Touch    |
| LED colours             | Red           |
| Control knob position   | Front         |
| Logo                    | Silk screen   |
| Serigraphy colour       | Grey          |

## Program / Functions




|                                   |     |
|-----------------------------------|-----|
| No. of induction cook zones       | 2   |
| No. of cooking zones with booster | 2   |
| Main on/off switch                | Yes |
| Power levels                      | 9   |
| Total no. of cook zones           | 2   |

## Options



|                      |                    |                             |     |
|----------------------|--------------------|-----------------------------|-----|
| Worktop Cut-Out      | 478-482x252-256 mm | Residual time indicator     | Yes |
| End cooking timer    | 2                  | Control Lock / Child Safety | Yes |
| Minute minder        | 1                  | Quick start                 | Yes |
| End of cooking alarm | Yes                |                             |     |

## Technical Features




Front-centre - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 14.5 cm

Rear-centre - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 21.0 cm

|  |     |  |     |
|--|-----|--|-----|
| Automatic setting according to pan dimension | Yes | Residual heat indicator                | Yes |
| pan detection                                | Yes | Eco-Off                                | Yes |
| Minimum pan diameter indication              | Yes | Protection against accidental start up | Yes |
| Automatic switch off when overheat           | Yes |  |     |

## Electrical Connection

|                                  |                   |                           |             |
|----------------------------------|-------------------|---------------------------|-------------|
| Electrical connection rating (W) | 3600 W            | Frequency (Hz)            | 50/60 Hz    |
| Current                          | 16 A              | Power supply cable length | 120 cm      |
| Voltage (V)                      | 220-240 V         | Plug                      | Not present |
| Type of electric cable installed | Yes, Single phase |                           |             |

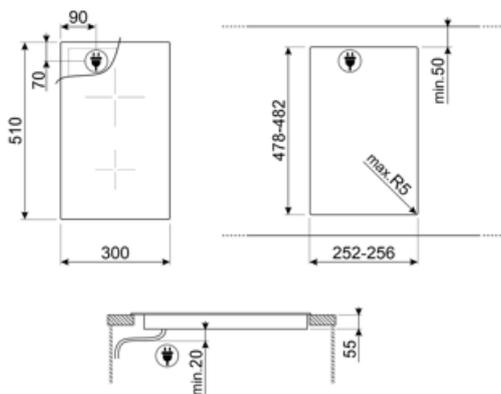

## Compatible Accessories

---



### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

---

## Symbols glossary

---

|  |   |   |  |
|--|---|---|--|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary.   |  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.                                 |
|  | Eco-Off: This energy-saving function shuts the zone down before the timer sounds, making use of the residual heat in the pan.   |  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.                            |
|  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.  |  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Time elapsed: shows how long the cooking zone has been in use.   |
|  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.  |  | Touch control  |