

# SI2641DAU



Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709341985



## Aesthetics



Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Gas_replacement	Yes
Type of control setting	Touch controls
Slider	Red
Control knob position	Front
Serigraphy colour	Grey

## Program / Functions



No. of induction cook zones	4
No. of cooking zones with booster	4
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

## Options



Standard cut out	478-482x555-560 mm	Residual time indicator	Yes
End cooking timer	4	Control Lock / Child Safety	Yes
Minute minder	4		
End of cooking alarm	Yes	Rapid level selection	Yes

## Technical Features



Front-left - Induction - Single - 1.60 kW - Booster 2.10 kW - Ø 21.0 cm

Rear-left - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 15.0 cm


Rear-right - Induction - Single - 1.60 kW - Booster 2.10 kW - Ø 21.0 cm

Front-right - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 15.0 cm

Automatic setting according to pan dimension	Yes	Automatic switch off when overheat	Yes
pan detection	Yes	Residual heat indicator	Yes
Minimum pan diameter indication	Yes	Protection against accidental start up	Yes

## Electrical Connection

Plug	Australia 15 AMP	Frequency (Hz)	50/60 Hz
Electrical connection rating (W)	2800 W	Power supply cable length	120 cm
Current	13 A	Terminal box	6 poles
Voltage (V)	220-240 V	Plug	UK
Type of electric cable	Single phase		

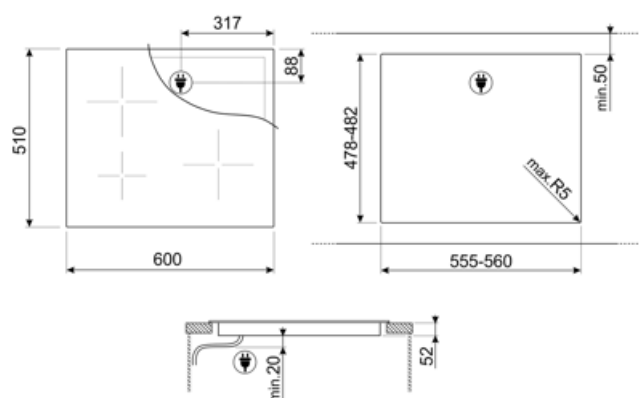

---

## Compatible Accessories

---



### SCRP











Induction and ceramic hobs and  
teppanyaki scraper



### TPK

Stainless steel grill plate to cook  
Teppanyaki dishes

## Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	CUT_OUT_STANDARD_72dpi		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.		Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		Touch control

---

## Benefit (TT)

---

### **Induction hobs**

Fast cooking and precise temperature control

### **Glass**

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

### **Ceramic**

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

### **Control knob position frontal**

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Nine power levels and Boost function for optimal cooking performance

Easy and immediate installation: compatible with gas cooktop cut-outs, allowing for replacement with no modifications