SI2641DL

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709347475

Aesthetics

Aesthetic	Universal
Colour	Black
Acabamento	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Frame	No
Type of control setting	Touch controls
Slider	No
Comandos Slider	Vermelho
Control knob position	Front
Serigraphy colour	Grey
Alternative colours available	No

Program / Functions

No. of induction cook zones	4
No. of cooking zones with booster	4
Main on/off switch	Yes
Power levels	9
Ventilação automática	No
Total no. of cook zones	4

Options

Multizone Option	No
Corte padrão	478-482x555-560 mm
Auto-boiling Function	No
Simmering Function	No
Keep warm automatic function	No
Melting/Low temperature cooking function	No
End cooking timer	4
Pause option	No
Minute minder	4
End of cooking alarm	Yes
Residual time indicator	Yes
Showroom Demo Option	No
Control Lock / Child Safety	Yes
Bridge option	No
Cleaning option	No
Quick start	No
Rapid level selection	Yes

Technical Features

Front-left - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 21.0 cm
Rear-left - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 15.0 cm
Rear-right - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 21.0 cm
Front-right - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 15.0 cm

Automatic setting according to pan dimension	Yes
pan detection	Yes
Detecção Automática Permanente de Pote com indicação do controle relativo	No
Minimum pan diameter indication	Yes
Automatic switch off when overheat	Yes
Automatic switch off when overflow	No
Residual heat indicator	Yes
Sensor de calor perfeito	No
Aquecimento Ecológico	No
Eco-Off	No
Protection against accidental start up	Yes

Accessories Included

Other accessories	No

Electrical Connection

Plug	(F;E) Schuko
Electrical connection rating (W)	2800 W
Current	13 A
Voltage (V)	220-240 V
Type of electric cable	Single phase
Type of electric cable	No
Type of electric cable supplied	No
Frequency (Hz)	50/60 Hz
Comprimento do cabo de alimentação	180 cm
Placa de bornes	6 polos
Ficha elétrica	Schuko (F;E)

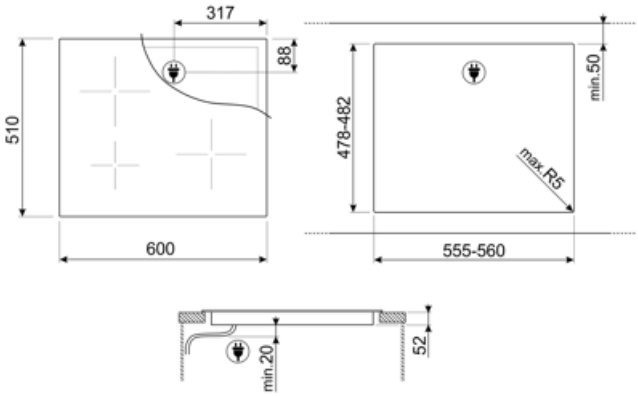
317
88
510
600
478-482
min.50
max.R5
555-560
min.20
52

Compatible Accessories

SCRP

Placas de indução e de cerâmica e raspador teppanyaki

TPK

Placa grelhadora de aço inoxidável para cozinhar pratos Teppanyaki

Symbols glossary

Impulsionador de potência: opção permite que a zona funcione em potência máxima quando é necessário cozinhar muito intensamente.

CUT_OUT_STANDARD_72dpi

Indução: O trabalho destas placas baseia-se no princípio da indução electromagnética. O calor é gerado diretamente na parte inferior da panela durante o seu contato com a placa.

Indicação de calor residual: Depois de a placa de cerâmica de vidro ter sido desligada, o indicador de calor residual mostra qual das zonas de aquecimento ainda permanece quente. Quando a temperatura cai abaixo de 60°C, o indicador se apaga.

Temporizador: Todas as placas de cerâmica têm um temporizador que termina automaticamente o cozimento após um tempo predefinido.

Bloqueio para crianças: alguns modelos estão equipados com um dispositivo para bloquear o programa/ciclo para que não possa ser acidentalmente alterado.

Protecção contra o sobreaquecimento: O sistema de segurança que desliga automaticamente a placa em caso de sobreaquecimento da unidade de controle.

Seleção rápida, com um toque de cozimento começa no nível mais alto, em seguida, reduz automaticamente após o tempo. Ideal para pratos que exigem fervura rápida e, em seguida, cozimento contínuo sem controle constante (por exemplo, caldo de carne).

Tempo decorrido: mostra há quanto tempo a zona de cozedura está em uso.

Touch Control

Benefit (TT)

Induction hobs

Fast cooking and precise temperature control

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

Ceramic

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Nine power levels and Boost function for optimal cooking performance