SI2641DUK

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709326975



Aesthetics

Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Type of control setting	Digi Touch
LED colours	Red
Control knob position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of induction cook zones	4
No. of cooking zones with booster	4
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options

Worktop Cut-Out	478-482x555-560 mm	**Residual time indicator**	Yes
End cooking timer	4	**Control Lock / Child Safety**	Yes
Minute minder	4	**Rapid level selection**	Yes
End of cooking alarm	Yes		


Technical Features

Front-left - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 21.0 cm
Rear-left - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 15.0 cm
Rear-right - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 21.0 cm
Front-right - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 15.0 cm

Automatic setting according to pan dimension	Yes	**Automatic switch off when overheat**	Yes
pan detection	Yes	**Residual heat indicator**	Yes
Minimum pan diameter indication	Yes	**Protection against accidental start up**	Yes

Electrical Connection

Electrical connection rating (W)	2800 W	**Frequency (Hz)**	50/60 Hz
Current	13 A	**Power supply cable length**	120 cm
Voltage (V)	220-240 V	**Terminal box**	6 poles
Type of electric cable installed	Yes, Single phase	**Plug**	UK 13 AMP

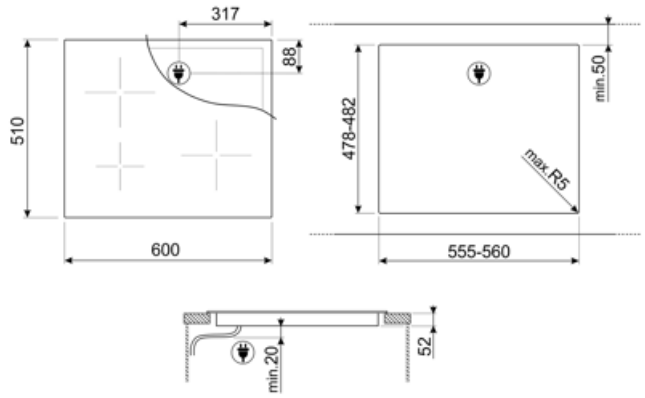

Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Touch control



CUT_OUT_STANDARD_72dpi



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.