


# SI2951D



|                       |                                    |
|-----------------------|------------------------------------|
| <b>Product Family</b> | Hob                                |
| <b>Built-in</b>       | Ultra-low profile or Fully Flushed |
| <b>Dimensions</b>     | 90 cm                              |
| <b>Power supply</b>   | Electric                           |
| <b>Type</b>           | Induction                          |
| <b>EAN code</b>       | 8017709310080                      |

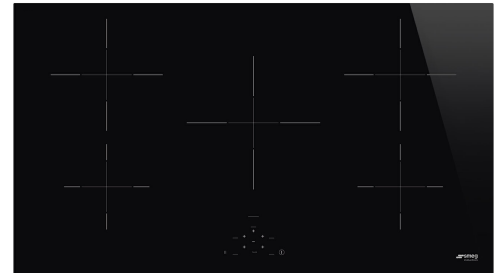

## Aesthetics



|                                |               |
|--------------------------------|---------------|
| <b>Aesthetics</b>              | Universal     |
| <b>Colour</b>                  | Black         |
| <b>Finishing</b>               | Glass         |
| <b>Material</b>                | Glass         |
| <b>Glass Type</b>              | Ceramic       |
| <b>Glass edge</b>              | Straight edge |
| <b>Type of control setting</b> | Digi Touch    |
| <b>Slider</b>                  | Red           |
| <b>Control knobs position</b>  | Front         |
| <b>Logo</b>                    | Silk screen   |
| <b>Serigraphy colour</b>       | Grey          |

## Program / Functions



|  |                      |
|--|----------------------|
| <b>No. of induction cook zones</b>       | 5                    |
| <b>Time-setting options</b>              | Automatic switch-off |
| <b>No. of cooking zones with booster</b> | 5                    |
| <b>Main on/off switch</b>                | Yes                  |
| <b>Power levels</b>                      | 9                    |
| <b>Total no. of cook zones</b>           | 5                    |

## Options



|                                      |                    |  |                          |
|--------------------------------------|--------------------|--|--------------------------|
| <b>Standard cut out</b>              | 482-486x839-844 mm | <b>Limited Power Consumption Mode</b>      | Yes advance              |
| <b>Keep warm automatic function</b>  | Yes                | <b>Limited Power Consumption Mode in W</b> | 2400 a 7400 - step 100 W |
| <b>End cooking timer</b>             | 5                  | <b>Show Room Demo Option</b>               | Yes                      |
| <b>Pause option</b>                  | Yes                | <b>Control Lock / Child Safety</b>         | Yes                      |
| <b>Minute minder</b>                 | 1                  | <b>Quick start</b>                         | Yes                      |
| <b>End of cooking acoustic alarm</b> | Yes                | <b>Rapid level selection</b>               | Yes                      |
| <b>Residual time indicator</b>       | Yes                |  |                          |

## Technical Features



Front left - Induction - single - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm  
 Rear left - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 20.0 cm  
 Central - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 25.0 cm  
 Rear right - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 20.0 cm  
 Front right - Induction - single - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm

|  |               |   |     |
|--|---------------|---|-----|
| <b>Automatic setting according to pan dimension</b>                              | Yes           | <b>Automatic switch off when overheat</b>     | Yes |
| <b>Automatic pan detection</b>   | Yes, min 7 cm | <b>Automatic switch off when overflow</b>     | Yes |
| <b>Permanent Automatic Pot Detection with indication of the relative control</b> | Yes           | <b>Residual heat indicator</b>                | Yes |
| <b>Minimum pan diameter indication</b>   | Yes           | <b>Protection against accidental start up</b> | Yes |

## Electrical Connection

|                               |              |                                  |              |
|-------------------------------|--------------|----------------------------------|--------------|
| <b>Nominal power (W)</b>      | 7400 W       | <b>Type of electric cable</b>    | Double phase |
| <b>Current</b>                | 33 A         | <b>Frequency (Hz)</b>            | 50/60 Hz     |
| <b>Voltage (V)</b>            | 220-240 V    | <b>Power supply cable length</b> | 120 cm       |
| <b>Voltage 2 (V)</b>          | 380-415 V    | <b>Terminal Box</b>              | 5 poles      |
| <b>Type of electric cable</b> | Single phase | <b>Plug</b>                      | No           |



---

## Compatible Accessories

---



### GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



### TPKPLATE

















Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



### SCRP

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary

|   |  |
|---|--|
|  <p>Permanent auto pot detection</p>  |  <p>Power booster: option allows the zone to work at full power when very intense cooking is necessary.</p>   |
|  <p>Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.</p>  |  <p>Touch control</p>   |
|  <p>Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.</p> |  <p>Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.</p>   |
|  <p>Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.</p>  |  <p>Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.</p>   |
|  <p>Min diameter pot detection of 7 cm.</p>   |  <p>PAUSE_72dpi</p>   |
|  <p>Possibility to set the maximum power absorption of the hob</p>   |  <p>Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).</p> |
|  <p>Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.</p>                                |  <p>Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.</p>   |
|  <p>Time elapsed: shows how long the cooking zone has been in use.</p>  |  <p>Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.</p>  |