

SI2951D




Product Family

Built-in type Ultra-low profile or Fully Flushed

Hob

Dimensions90 cmPower supplyElectricTypeInduction

EAN code 8017709310080



Aesthetics



Aesthetic Universale Colour Black Glass **Finishing** Material Glass Glass type Ceramic Glass edge Straight edge Type of control setting Digi Touch LED colours Red Control knob position Front Logo Silk screen Serigraphy colour Grey

Program / Functions



No. of induction cook zones

Time-setting options Spegnimento automatico

No. of cooking zones with booster 5
Main on/off switch Yes
Power levels 9
Total no. of cook zones 5

Options















Worktop Cut-Out 482-486x839-844 mm

Keep warm automatic Yes

function

5 End cooking timer Pause option Yes Minute minder 1 End of cooking alarm Yes Residual time indicator Yes

Limited Power

Consumption Mode

Limited Power 2400 a 7400 - step 100 W

Si Advance

Consumption Mode in W Showroom Demo Option Yes Control Lock / Child Yes

Safety

Quick start Yes Rapid level selection Yes

Technical Features











Front-left - Induction - Single - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm

Yes

Yes

Yes

Rear-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 20.0 cm

Central - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 25.0 cm

Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 20.0 cm

Front-right - Induction - Single - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm

Automatic setting according to pan

dimension

pan detection Yes. min 7 cm

Permanent Automatic Pot Detection with indication of the relative

control

Minimum pan diameter

indication

Automatic switch off when overheat

Automatic switch off

when overflow

Residual heat indicator Yes Protection against Yes

Yes

Yes

Yes, Double phase

50/60 Hz

120 cm

accidental start up

Electrical Connection

Electrical connection

rating (W)

Current 33 A Voltage (V) 220-240 V Voltage 2 (V) 380-415 V Type of electric cable Yes, Single phase

installed

7400 W Additional connection


modalities

Frequency (Hz) Power supply cable

length

Terminal box 5 poles Plug Not present



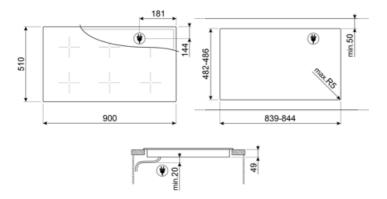



Compatible Accessories

GRILLPLATE



Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

TPKPLATE



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



Symbols glossary



Permanent auto pot detection



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Touch control



This function allows you to keep cooked food warm without burner it



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Min diameter pot detection of 7 cm



Possibility to set the maximum power absorbion of the hob