


# SI2951D



|                |                                    |
|----------------|------------------------------------|
| Product Family | Hob                                |
| Built-in type  | Ultra-low profile or Fully Flushed |
| Dimensions     | 90 cm                              |
| Power supply   | Electric                           |
| Type           | Induction                          |
| EAN code       | 8017709310080                      |

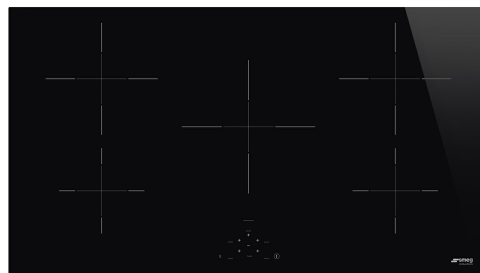

## Aesthetics



|                         |               |
|-------------------------|---------------|
| Aesthetic               | Universale    |
| Colour                  | Black         |
| Finishing               | Glass         |
| Material                | Glass         |
| Glass type              | Ceramic       |
| Glass edge              | Straight edge |
| Type of control setting | Digi Touch    |
| Slider                  | Yes           |
| LED colours             | Red           |
| Control knob position   | Front         |
| Serigraphy colour       | Grey          |

## Programs / Functions



|                                   |                        |
|-----------------------------------|------------------------|
| No. of induction cook zones       | 5                      |
| Time-setting options              | Spegnimento automatico |
| No. of cooking zones with booster | 5                      |
| Main on/off switch                | Yes                    |
| Power levels                      | 9                      |
| Total no. of cook zones           | 5                      |

## Options



|                                     |                    |
|-------------------------------------|--------------------|
| <b>Worktop Cut-Out</b>              | 482-486x839-844 mm |
| <b>Keep warm automatic function</b> | Yes                |
| <b>End cooking timer</b>            | 5                  |
| <b>Pause option</b>                 | Yes                |
| <b>Minute minder</b>                | 1                  |
| <b>End of cooking alarm</b>         | Yes                |
| <b>Residual time indicator</b>      | Yes                |

|  |                          |
|--|--------------------------|
| <b>Limited Power Consumption Mode</b>      | Si Advance               |
| <b>Limited Power Consumption Mode in W</b> | 2400 a 7400 - step 100 W |
| <b>Showroom Demo Option</b>                | Yes                      |
| <b>Control Lock / Child Safety</b>         | Yes                      |
| <b>Quick start</b>                         | Yes                      |
| <b>Rapid level selection</b>               | Yes                      |

## Technical Features




Front-left - Induction - Single - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm  
 Rear-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 20.0 cm  
 Central - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 25.0 cm  
 Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 20.0 cm  
 Front-right - Induction - Single - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm

|  |               |   |     |
|--|---------------|---|-----|
| <b>Automatic setting according to pan dimension</b>                              | Yes           | <b>Automatic switch off when overheat</b>     | Yes |
| <b>pan detection</b>   | Yes, min 7 cm | <b>Automatic switch off when overflow</b>     | Yes |
| <b>Permanent Automatic Pot Detection with indication of the relative control</b> | Yes           | <b>Residual heat indicator</b>                | Yes |
| <b>Minimum pan diameter indication</b>   | Yes           | <b>Protection against accidental start up</b> | Yes |

## Electrical Connection

|   |             |   |                   |
|---|-------------|---|-------------------|
| <b>Plug</b>                             | Not present | <b>Type of electric cable installed</b> | Yes, Single phase |
| <b>Electrical connection rating (W)</b> | 7400 W      | <b>Additional connection modalities</b> | Yes, Double phase |
| <b>Current</b>                          | 33 A        | <b>Frequency (Hz)</b>                   | 50/60 Hz          |
| <b>Voltage (V)</b>                      | 220-240 V   | <b>Power supply cable length</b>        | 120 cm            |
| <b>Voltage 2 (V)</b>                    | 380-415 V   | <b>Terminal box</b>                     | 5 poles           |

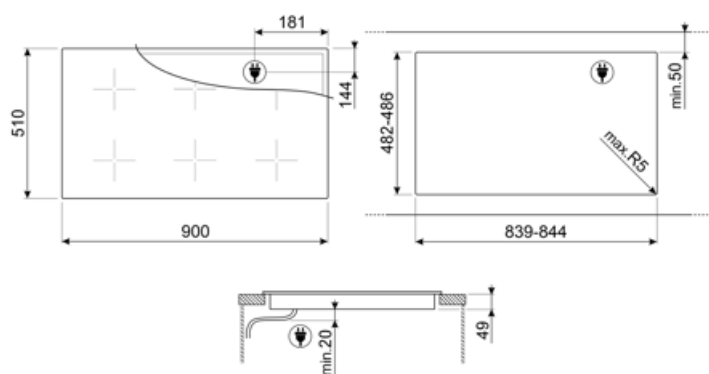

---

## Compatible Accessories

---



### GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



### TPKPLATE


















Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

## Symbols glossary

|  |   |   |  |
|--|---|---|--|
|    | Permanent auto pot detection  |    | Power booster: option allows the zone to work at full power when very intense cooking is necessary.  |
|    | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.  |    | Touch control  |
|    | The slider control panel allows you to adjust the power simply by passing your finger across the touch device.  |    | This function allows you to keep cooked food warm without burner it  |
|    | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.   |    | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |
|    | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.   |    | Min diameter pot detection of 7 cm   |
|   | All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated. |   | Possibility to set the maximum power absorption of the hob   |
|  | Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).                    |  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.                                 |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.                       |  | Time elapsed: shows how long the cooking zone has been in use.   |
|  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.  |   |  |