


SI2951D



Familie
Inbouw
Afmeting
Voeding
Type
EAN-code

Kookplaat
Vlak opbouw of vlak inbouw
90 cm
Elektrisch
Inductie
8017709310080

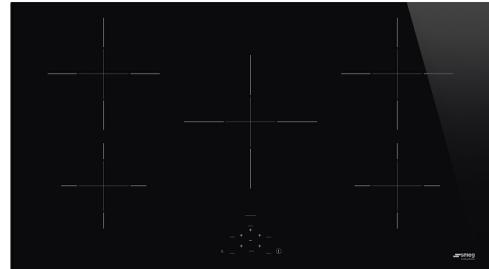

Design



Esthetiek
Kleur
Afwerking
Materiaal
Type glas
Glazen rand
Type bediening
Slider
Slider
Positie bediening
Kleur serigrafie

Universeel
Zwart
Glas
Glas
Keramisch
Rechte rand
Touch control
Ja
Rood
Voor
Grijs

Program / Functions



Aantal inductiekookzones
Opties tijdprogrammering
Aantal kookzones met booster
Hoofdtoets aan/uit
Vermogen niveaus
Totaal aantal kookzones

5
Automatische uitschakeling
5
Ja
9
5

Opties



Worktop Cut-Out	482-486x839-844 mm	ECO-Logic optie	Ja, Advance
Warmhoudfunctie	Ja	ECO-Logic optie - stappen	2400 a 7400 - step 100 W
Automatische uitschakeling	5	Showroom demo optie	Ja
Pauze optie	Ja	Kinderbeveiliging	Ja
Timer	1	Quick start	Ja
Akoestisch signaal einde kooktijd	Ja	Snelle selectie niveaus	Ja
Resttijd indicator	Ja		

Technische specificaties



Linksvoor - Inductie - enkel - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm

Linksachter - Inductie - enkel - 2.30 kW - Booster 3.00 kW - Ø 20.0 cm

Midden - Inductie - enkel - 2.30 kW - Booster 3.00 kW - Ø 25.0 cm

Rechtsachter - Inductie - enkel - 2.30 kW - Booster 3.00 kW - Ø 20.0 cm

Rechtsvoor - Inductie - enkel - 1.40 kW - Booster 2.10 kW - Ø 16.0 cm

Automatische herkenning panafmeting	Ja	Automatische stop bij oververhitting	Ja
--	----	---	----


Automatische panherkenning	minimaal 7 cm	Automatisch uitschakelen i.g.v.	Ja
-----------------------------------	---------------	--	----

Permanente automatische pandetectie met indicatie van de relatieve controle	Ja	overkoken	
--	----	------------------	--

Indicator minimaal te gebruiken diameter	Ja	Restwarmte indicator beveiliging tegen onbedoeld inschakeling	Ja
---	----	--	----

Elektrische aansluiting

Aansluitwaarde	7400 W	Type stroomkabel	Twee-fasen
Stroom	33 A	Frequentie	50/60 Hz
Spanning (V)	220-240 V	Lengte voedingskabel	120 cm
Spanning 2 (V)	380-415 V	Connection box	5 polig
Type stroomkabel	Eenfasig	Stekker	No

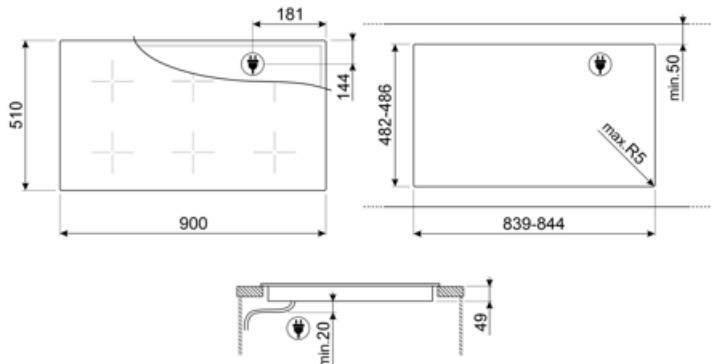

Compatibele Accessoires



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



SCRP

Inductie- en keramische kookplaten en teppanyaki-schraper



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

Symbols glossary

	Powerbooster: optie zorgt ervoor dat de zone op vol vermogen werkt wanneer zeer intensief koken nodig is.		Kinderslot: sommige modellen zijn voorzien van een apparaat om het programma / de cyclus te vergrendelen zodat het niet kan per ongeluk veranderd
	The slider control panel allows you to adjust the power simply by passing your finger across the touch device.		This function allows you to keep cooked food warm without burner it
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		Permanent auto pot detection
	Min diameter pot detection of 7 cm		Possibility to set the maximum power absorbtion of the hob
	Touch control		



Benefit (TT)

Induction hobs

Fast cooking and precise temperature control

Immediate access to functions via touch display, for simple and intuitive control

Keep Warm function

Dishes always served at the right temperature, even after cooking, thanks to the Keep Warm function

Nine power levels and Boost function for optimal cooking performance

Permanent Automatic Pot Detection with indication of the relative control

Automatic activation of the correct cooking zone with Autopot Detection, recognizing the pot without user intervention