SI2B22641D

Product Family	Hob
Built-in	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709357665



Aesthetics

Aesthetics	Musa
Colour	Black
Finishing	Glass
Material	Glass
Glass Type	Ceramic
Glass edge	Straight edge
Gas_replacement	Yes
Type of control setting	Digi Touch
Slider	Red
Control knobs position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of induction cook zones	4
Time-setting options	Automatic switch-off
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options

Flexible Zone Type	Bridge
Standard cut out	478-482x555-560 mm
End cooking timer	4
Minute minder	1
End of cooking acoustic alarm	Yes
Residual time indicator	Yes
Limited Power Consumption Mode	Yes
Control Lock / Child Safety	Yes
Bridge option	Yes

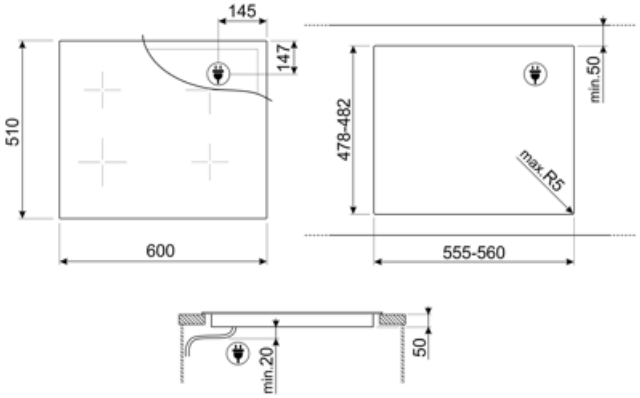
Technical Features

Front left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm
Rear left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm
Rear right - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm
Front right - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Left Multizone dimension	38.5x18.0 cm
Right Multizone dimension	38.5x18.0 cm
Booster power left Multizone	3 kW
Booster power right Multizone	3 kW
Automatic setting according to pan dimension	Yes
Automatic pan detection	Yes, min 9 cm
Minimum pan diameter indication	Yes
Automatic switch off when overheat	Yes
Residual heat indicator	Yes
Protection against accidental start up	Yes

Electrical Connection

Nominal power (W)	7200 W
Current	32 A
Voltage (V)	220-240 V
Voltage 2 (V)	380-415 V
Type of electric cable	Single phase
Type of electric cable	Yes, Double and Three Phase
Frequency (Hz)	50/60 Hz
Power supply cable length	120 cm
Plug	No


145
147
510
600
478-482
min.50
max.R5
555-560
min.20
50

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



CUT_OUT_STANDARD_72dpi



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Min diameter pot detection of 9 cm



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Time elapsed: shows how long the cooking zone has been in use.



TWIN_ZONE_72dpi



Touch control