


# SI2B22741D



Product Family	Hob
Built-in	Ultra-low profile or Fully Flushed
Dimensions	70/75 cm
Power supply	Electric
Type	Induction
EAN code	8017709357672

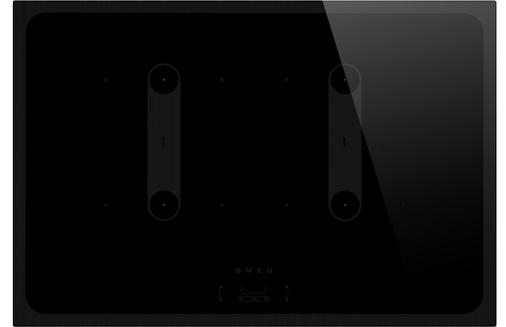

## Aesthetics



Aesthetics	Musa
Colour	Black
Finishing	Glass
Material	Glass
Glass Type	Ceramic
Glass edge	Straight edge
Gas_replacement	Yes
Type of control setting	Digi Touch
Slider	Red
Control knobs position	Front
Logo	Silk screen
Serigraphy colour	Grey

## Program / Functions



No. of induction cook zones	4
Time-setting options	Automatic switch-off
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

## Options



<b>Flexible Zone Type</b>	Bridge	<b>Residual time indicator</b>	Yes
<b>Standard cut out</b>	478-482x555-560 mm	<b>Limited Power Consumption Mode</b>	Yes
<b>End cooking timer</b>	4	<b>Limited Power Consumption Mode in W</b>	1000, 1600, 2200, 2800, 3500, 6000, 7200 W
<b>Minute minder</b>	1	<b>Control Lock / Child Safety</b>	Yes
<b>End of cooking acoustic alarm</b>	Yes	<b>Bridge option</b>	Yes

## Technical Features




Front left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm  
 Rear left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm  
 Rear right - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm  
 Front right - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

<b>Left Multizone dimension</b>	38.5x18.0 cm	<b>Automatic pan detection</b>	Yes, min 9 cm
<b>Right Multizone dimension</b>	38.5x18.0 cm	<b>Minimum pan diameter indication</b>	Yes
<b>Booster power left Multizone</b>	3 kW	<b>Automatic switch off when overheat</b>	Yes
<b>Booster power right Multizone</b>	3 kW	<b>Residual heat indicator</b>	Yes
<b>Automatic setting according to pan dimension</b>	Yes	<b>Protection against accidental start up</b>	Yes

## Electrical Connection

<b>Nominal power (W)</b>	7200 W	<b>Type of electric cable</b>	Yes, Double and Three Phase
<b>Current</b>	32 A	<b>Frequency (Hz)</b>	50/60 Hz
<b>Voltage (V)</b>	220-240 V	<b>Power supply cable length</b>	120 cm
<b>Voltage 2 (V)</b>	380-415 V	<b>Plug</b>	No
<b>Type of electric cable</b>	Single phase		

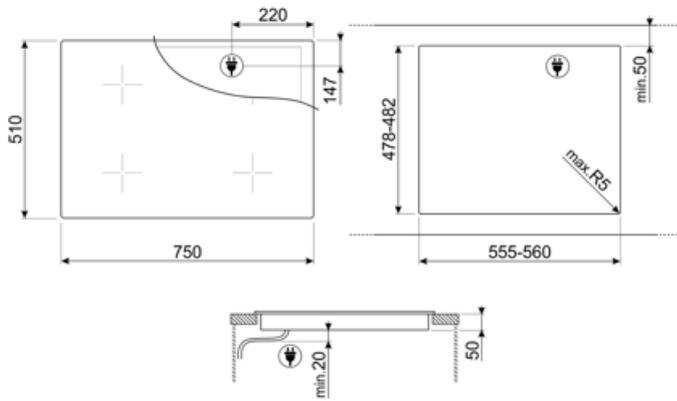

---

## Compatible Accessories

---



### GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



### TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



### SCRP

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	Touch control		CUT_OUT_STANDARD_72dpi
	ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.		Min diameter pot detection of 9 cm
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		TWIN_ZONE_72dpi