SI2B22741D

Product familie	Kookplaat
Type	Standaard opbouw of vlakbouw
Afmeting	70/75 cm
Voeding	Elektrisch
Type	Inductie
EAN-code	8017709357672



Design

Design	Musa
Kleur	Zwart
Afwerking	Glas
Materiaal	Glas
Type glas	Keramisch
Glazen rand	Rechte rand
Gas_replacement	Yes
Bediening	Digi touch multi slider
Kleur LED	Rood
Positie bediening	Vooraan
Logo	Geëtst
Kleur serigrafie	Grijs

Program / Functions

Aantal inductiekookzones	4
Opties tijdprogrammering	Automatische uitschakeling
Aantal kookzones met booster	4
Aantal Multizones	2
Hoofdtoets aan/uit	Ja
Vermogenniveaus	9
Totaal aantal kookzones	4

Opties

Flexible Zone Type	Bridge	**Resttijd indicator**	Ja
Worktop Cut-Out	478-482x555-560 mm	**ECO-Logic optie**	Ja
Automatische uitschakeling	4	**Beperkt vermogensverbruik**	1000, 1600, 2200, 2800, 3500, 6000, 7200 W
Timer	1	**Kinderbeveiliging**	Ja
Geluidssignaal einde kooktijd	Ja	**TwinZone optie**	Ja

Technische specificaties

Linksvoor - Inductie - enkel - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Linksachter - Inductie - enkel - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

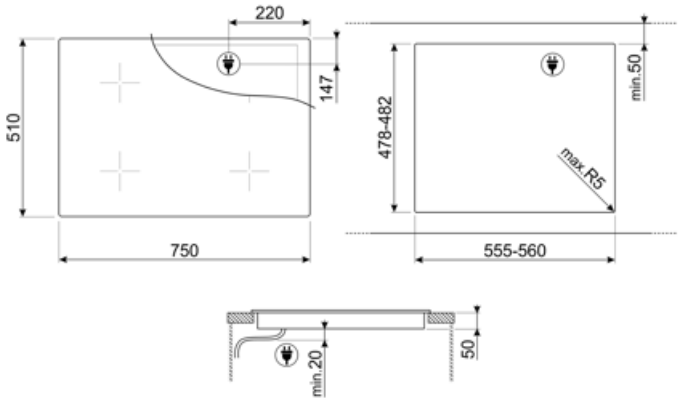
Rechtsachter - Inductie - enkel - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Rechtsvoor - Inductie - enkel - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Afmetingen Multizone links	38.5x18.0 cm	**Automatische panherkenning**	Ja, min. 9 cm
Afmetingen Multizone rechts	38.5x18.0 cm	**Indicator minimaal te gebruiken diameter**	Ja
Vermogen booster linker Multizone	3 kW	**Automatisch uitschakelen i.g.v. oververhitting**	Ja
Vermogen booster rechter Multizone	3 kW	**Restwarmte indicator**	Ja
Automatische aanpassing panafmeting	Ja	**Beveiliging tegen accidentele inschakeling**	Ja

Elektrische aansluiting

Nominale aansluitwaarde	7200 W	**Type stroomkabel**	Yes, Double and Three Phase
Stroom	32 A	**Type of electric cable supplied**	No
Spanning (V)	220-240 V	**Frequentie**	50/60 Hz
Spanning 2 (V)	380-415 V	**Lengte voedingskabel**	120 cm
Type stroomkabel	Eenfasig	**Stekker**	Nee


220
147
510
750
478-482
min.50
max.R5
555-560
min.20
50

Compatible Accessories



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Schraper voor inductie- en vitrokeramische kookplaten

Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Touch control



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Time elapsed: shows how long the cooking zone has been in use.



TWIN_ZONE_72dpi



Sommige modellen zijn voorzien van een functie om het programma/de cyclus te blokkeren zodat het niet per ongeluk kan aangepast worden.



CUT_OUT_STANDARD_72dpi



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Min diameter pot detection of 9 cm.