
SI2M5643D1

Familie	Kookplaat
Inbouw	Vlak opbouw of vlak inbouw
Afmeting	60 cm
Voeding	Elektrisch
Type	Inductie
EAN-code	8017709337940

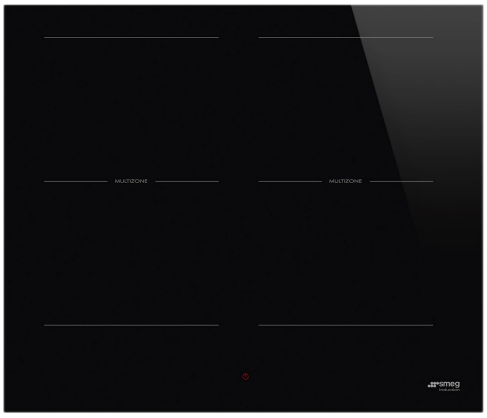

Design

Esthetiek	Universeel
Kleur	Zwart
Afwerking	Glas
Materiaal	Glas
Type glas	Keramisch
Glazen rand	Rechte rand
Type bediening	Compact Lite
Slider	Ja
Slider	Rood
Positie bediening	Voor
Logo	Geëtst
Kleur serigrafie	Grijs

Program / Functions

Aantal inductiekookzones	4
Opties tijdprogrammering	Automatische uitschakeling
Aantal kookzones met booster	4
Aantal Multizones	2
Hoofdtoets aan/uit	Ja
Vermogenniveaus	17
Totaal aantal kookzones	4

Opties

Multizone optie	Ja
Flexible Zone Type	MultiZone
Worktop Cut-Out	478-482x555-560 mm
Multizone optie	Ja
Warmhoudfunctie	Ja
Grill functie	Ja
Automatische uitschakeling	4
Pauze optie	Ja
Timer	1
Akoestisch signaal einde kooktijd	Ja
Resttijd indicator	Ja
ECO-Logic optie	Ja, Advance
ECO-Logic optie - stappen	2400 a 7400 - step 100 W
Showroom demo optie	Ja
Kinderbeveiliging	Ja
Optie Toetsblokkering t.b.v. reininging	Ja
Quick start	Ja
Snelle selectie niveaus	Ja


Technische specificaties

Linksvoor - Inductie - enkel - 2.10 kW - Booster 2.50 - 3.00 kW - Double booster 3.00 kW - Ø 18.0 cm
Linksachter - Inductie - enkel - 2.10 kW - Booster 2.50 - 3.00 kW - Double booster 3.00 kW - Ø 18.0 cm
Rechtsachter - Inductie - enkel - 2.10 kW - Booster 2.50 - 3.00 kW - Double booster 3.00 kW - Ø 18.0 cm
Rechtsvoor - Inductie - enkel - 2.10 kW - Booster 2.50 - 3.00 kW - Double booster 3.00 kW - Ø 18.0 cm
Multizone left - Booster 3.70 kW
Multizone right - Booster 3.70 kW - 36.0x22.0 cm

Automatische herkenning panafmeting	Ja
Automatische panherkenning	minimaal 9 cm
Permanente automatische pandetectie met indicatie van de relatieve controle	Ja
Indicator minimaal te gebruiken diameter	Ja
Automatische stop bij oververhitting	Ja
Automatisch uitschakelen i.g.v. overkoken	Ja
Restwarmte indicator	Ja
Eco-Heat	Ja
beveiliging tegen onbedoeld inschakeling	Ja

Elektrische aansluiting

Aansluitwaarde	7400 W
Stroom	33 A
Spanning (V)	220-240 V
Spanning 2 (V)	380-415 V
Type stroomkabel	Eenfasig
Type stroomkabel	Yes, Double and Three Phase
Frequentie	50/60 Hz
Lengte voedingskabel	120 cm
Connection box	5 polig
Stekker	Nee

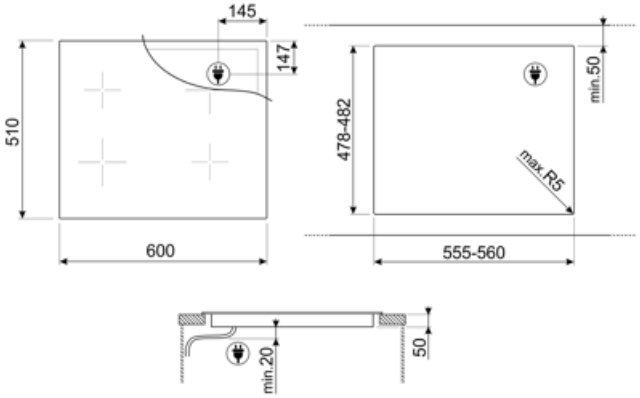
145
147
510
600
478-482
min.50
max.R5
555-560
min.20
50

Compatibele Accessoires



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Inductie- en keramische kookplaten en teppanyaki-schraper

Symbols glossary



Permanent auto pot detection



Kinderslot: sommige modellen zijn voorzien van een apparaat om het programma / de cyclus te vergrendelen zodat het niet kan per ongeluk veranderd



CUT_OUT_STANDARD_72dpi



Eco-Heat: deze functie waarschuwt wanneer de zone na het uitschakelen nog warm is. Dit zorgt niet alleen voor maximale veiligheid door brandwonden te voorkomen, maar ook om de restwarmte te gebruiken om door te koken of om voedsel warm te houden.



This function allows you to keep cooked food warm without burner it



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Powerbooster: optie zorgt ervoor dat de zone op vol vermogen werkt wanneer zeer intensief koken nodig is.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Additional maximum power level for a better energy consumption



Grill function



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



Min diameter pot detection of 9 cm.



Possibility to set the maximum power absorbion of the hob.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Time elapsed: shows how long the cooking zone has been in use.