SI2M6644T

Product Family	Hob
Built-in type	Traditional
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709365875

Aesthetics

Aesthetic	Dolce Stil Novo
Colour	Black
Material	Glass
Glass type	Ceramic Eclipse
Glass edge	Straight edge
Type of control setting	Multi Slider Pro
Slider	Yes
LED colours	White
Control knob position	Front
Components finishing	Titanium
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of induction cook zones	4
Time-setting options	Automatic switch-off
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	17
Auto-vent 2.0	Yes
Total no. of cook zones	4

Options

Multizone Option	Yes	**End of cooking alarm**	Yes
Flexible Zone Type	MultiZone	**Residual time indicator**	Yes
Worktop Cut-Out	478-482x555-560 mm	**Limited Power Consumption Mode**	Si Advance
Double Booster	Yes	**Limited Power Consumption Mode in W**	2400 a 7400 - step 100 W
Keep warm automatic function	Yes	**Showroom Demo Option**	Yes
Grill function	Yes	**Control Lock / Child Safety**	Yes
End cooking timer	4	**Bridge option**	si-AUTO
Pause option	Yes	**Quick start**	Yes
Minute minder	1	**Rapid level selection**	Yes

Technical Features

Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 21.0x18.0 cm
Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 21.0x18.0 cm
Rear-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 21.0x18.0 cm
Front-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 21.0x18.0 cm
Multizone left - Booster 3.70 kW - 36x21 cm
Multizone right - Booster 3.70 kW - 36x21 cm

Automatic setting according to pan dimension	Yes	**Automatic switch off when overflow**	Yes
pan detection	Yes, min. 9 cm	**Residual heat indicator**	Yes
Permanent Automatic Pot Detection with indication of the relative control	Yes	**Protection against accidental start up**	Yes
Automatic switch off when overheat	Yes		

Electrical Connection

Electrical connection rating (W)	7400 W	**Additional connection modalities**	Yes, Double phase
Current	33 A	**Frequency (Hz)**	50/60 Hz
Voltage (V)	220-240 V	**Power supply cable length**	120 cm
Voltage 2 (V)	380-415 V	**Terminal box**	5 poles
Type of electric cable installed	Yes, Single phase	**Plug**	Not present

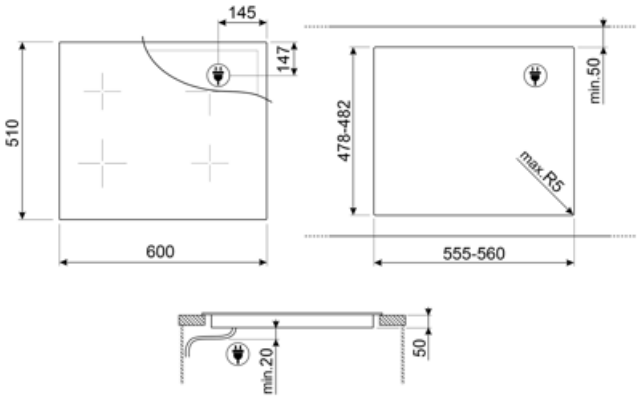
145
147
510
600
478-482
min.50
max.R5
555-560
min.20
50

Compatible Accessories

GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

KITH662X

TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

KITH662C

SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

Permanent auto pot detection

Power booster: option allows the zone to work at full power when very intense cooking is necessary.

Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.

CUT_OUT_STANDARD_72dpi

Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.

Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility

All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.

Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.

Time elapsed: shows how long the cooking zone has been in use.

Grill function

Possibility to set the maximum power absorbion of the hob.

Darkness becomes light

Connection between hob and hood

Standard installation: Traditional installation in tabletop, suitable for any kitchen sets.

The slider control panel allows you to adjust the power simply by passing your finger across the touch device.

This function allows you to keep cooked food warm without burner it

Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.

Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.

Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).

Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.

Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.

Min diameter pot detection of 9 cm.

Additional maximum power level for a better energy consumption