

SI364BM





Product Family Hob
Built-in type Traditional
Dimensions 60 cm
Power supply Electric
Type Induction
EAN code 801770927

60 cm
Electric
Induction
8017709275884

Aesthetics



AestheticClassicColourBlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeAngled edgeType of control settingControl knobs

Slider Red
Control knob position Front
No. of controls 4

Controls colourSteel effectSerigraphy colourGrey

Program / Functions



No. of induction cook zones 4
No. of cooking zones with booster 4
Power levels 9
Total no. of cook zones 4

Options











Standard cut out 478-482x555-560 mm

Yes

Consumption Mode

Limited Power

Limited Power

1900, 2600, 3000, 3800,

Consumption Mode in W 4500 W

Control Lock / Child

Safety

Quick start Yes

Yes

Technical Features





Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm Rear-left - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Front-right - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm

Automatic setting according to pan

dimension

pan detection Yes Minimum pan diameter Yes

indication

Automatic switch off when overheat

Residual heat indicator Yes Protection against Yes

accidental start up

Electrical Connection

Electrical connection 7400 W Type of electric cable Yes, Double and Three

rating (W)

Current 33 A 220-240 V Voltage (V) 380-415 V Voltage 2 (V)

Type of electric cable Single phase


Yes

Phase

50/60 Hz Frequency (Hz) Power supply cable 120 cm

length

Terminal box 6 poles

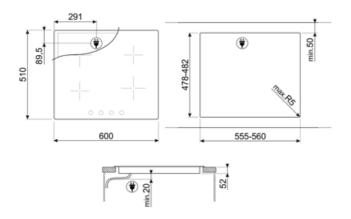



Compatible Accessories

5MP3MB





KITCVRI

Silicon cover kit with tactil indicators of the cooking areas. Accessory for induction hob with knobs SI364BM. Dishwasher safe.





Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



Induction and ceramic hobs and teppanyaki scraper



Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



CUT_OUT_STANDARD_72dpi



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Knobs control



Benefit (TT)

ı	nd	luct	IOD	hΛ	nc
ı	HU	uct	1011	110	บอ

Fast cooking and precise temperature control

Accurate power adjustment via knobs, for more precise cooking level control

Energy consumption optimization with Eco-Logic Advance, allowing absorption limitation from $2.4~\mathrm{kW}$ in $0.1~\mathrm{kW}$ steps

Nine power levels and Boost function for optimal cooking performance