

SI364BM



Product Family	Hob
Built-in type	Traditional
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709275884



Aesthetics



Aesthetic	Classica
Colour	Black
Acabamento	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Angled edge
Type of control setting	Control knobs
Comandos Slider	Vermelho
Control knob position	Front
No. of controls	4
Controls colour	Steel effect
Illuminated control knobs	No
Control knob protection	No
Serigraphy colour	Grey

Program / Functions



No. of induction cook zones	4
No. of cooking zones with booster	4
Main on/off switch	No
Power levels	9
Total no. of cook zones	4

Options



Multizone Option	No	Limited Power Consumption Mode	Yes
Corte padrão	478-482x555-560 mm	Limited Power Consumption Mode in W	1900, 2600, 3000, 3800, 4500 W
Auto-boiling Function	No	Showroom Demo Option	No
Simmering Function	No	Control Lock / Child Safety	Yes
Melting/Low temperature cooking function	No	Bridge option	No
Pause option	No	Cleaning option	No
End of cooking alarm	No	Quick start	Yes
Residual time indicator	No	Rapid level selection	No

Technical Features




Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm			
Rear-left - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm			
Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm			
Front-right - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm			
Automatic setting according to pan dimension	Yes	Residual heat indicator	Yes
pan detection	Yes	Sensor de calor perfeito	No
Minimum pan diameter indication	Yes	Aquecimento Ecológico	No
Automatic switch off when overheat	Yes	Eco-Off	No
Automatic switch off when overflow	No	Protection against accidental start up	Yes

Accessories Included

Other accessories	No
--------------------------	----

Electrical Connection

Plug	No	Type of electric cable	Yes, Double and Three Phase
Electrical connection rating (W)	7400 W	Type of electric cable supplied	No
Current	33 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Comprimento do cabo de alimentação	120 cm
Voltage 2 (V)	380-415 V	Placa de bornes	6 polos
Type of electric cable	Single phase		

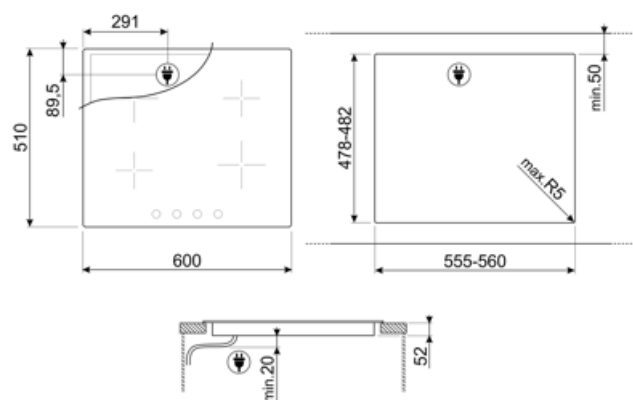

Compatible Accessories

5MP3MB



KITCVRI



Silicon cover kit with tactil indicators of the cooking areas. Accessory for induction hob with knobs SI364BM. Dishwasher safe.

TPKPLATE



Placa universal para placas de indução, gás, cerâmica e fogões elétricos. Superfície antiaderente ideal para cozinhar peixe, ovos e vegetais. Dimensões: 410 X 240 mm.

GRILLPLATE



Placa de rede universal para indução, gás, cerâmica e fogões elétricos. Superfície antiaderente ideal para cozinhar carne, queijo e vegetais. Dimensões: 410 x 240 mm.

SCRP



Placas de indução e de cerâmica e raspador teppanyaki

Symbols glossary

	Impulsionador de potência: opção permite que a zona funcione em potência máxima quando é necessário cozinhar muito intensamente.		Instalação padrão: Instalação tradicional em tampo de mesa, adequado para qualquer conjunto de cozinha
	Bloqueio para crianças: alguns modelos estão equipados com um dispositivo para bloquear o programa/ciclo para que não possa ser acidentalmente alterado.		CUT_OUT_STANDARD_72dpi
	ECO-logic: opção permite-lhe restringir o limite de potência da poupança de energia real do aparelho.		Protecção contra o sobreaquecimento: O sistema de segurança que desliga automaticamente a placa em caso de sobreaquecimento da unidade de controle.
	Indução: O trabalho destas placas baseia-se no princípio da indução electromagnética. O calor é gerado diretamente na parte inferior da panela durante o seu contato com a placa.		Função de arranque rápido: a temperatura escolhida é atingida mais rapidamente. O elemento de aquecimento funciona na potência máxima até que a temperatura certa seja atingida.
	Indicação de calor residual: Depois de a placa de cerâmica de vidro ter sido desligada, o indicador de calor residual mostra qual das zonas de aquecimento ainda permanece quente. Quando a temperatura cai abaixo de 60°C, o indicador se apaga.		Controle dos botões

Benefit (TT)

Induction hobs

Fast cooking and precise temperature control

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

Ceramic

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Accurate power adjustment via knobs, for more precise cooking level control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Energy consumption optimization with Eco-Logic Advance, allowing absorption limitation from 2.4 kW in 0.1 kW steps

Nine power levels and Boost function for optimal cooking performance