

SI364FXM



| | |
|----------------|---------------|
| Product Family | Hob |
| Built-in type | Traditional |
| Dimensions | 60 cm |
| Power supply | Electric |
| Type | Induction |
| EAN code | 8017709275891 |



Aesthetics



| | |
|-------------------------|-----------------|
| Aesthetic | Classica |
| Colour | Stainless steel |
| Material | Stainless Steel |
| Frame | Yes |
| Frame colour | Steel effect |
| Type of control setting | Control knobs |
| LED colours | Red |
| Control knob position | Front |
| No. of controls | 4 |
| Controls colour | Steel effect |
| Serigraphy colour | Black |

Program / Functions



| | |
|-----------------------------------|---|
| No. of induction cook zones | 4 |
| No. of cooking zones with booster | 4 |
| Power levels | 9 |
| Total no. of cook zones | 4 |

Options



| | |
|-----------------|--------------------|
| Worktop Cut-Out | 478-482x555-560 mm |
|-----------------|--------------------|

| | | | |
|-------------------------------------|--------------------------------|-----------------------------|-----|
| Limited Power Consumption Mode | Yes | Control Lock / Child Safety | Yes |
| Limited Power Consumption Mode in W | 1900, 2600, 3000, 3800, 4500 W | Quick start | Yes |

Technical Features



Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Rear-left - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm


Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Front-right - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm

| | | | |
|--|-----|--|-----|
| Automatic setting according to pan dimension | Yes | Automatic switch off when overheat | Yes |
| pan detection | Yes | Residual heat indicator | Yes |
| Minimum pan diameter indication | Yes | Protection against accidental start up | Yes |

Electrical Connection

| | | | |
|----------------------------------|-------------|----------------------------------|-----------------------------|
| Plug | Not present | Type of electric cable installed | Yes, Single phase |
| Electrical connection rating (W) | 7400 W | Additional connection modalities | Yes, Double and Three Phase |
| Current | 33 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 120 cm |
| Voltage 2 (V) | 380-415 V | Terminal box | 6 poles |

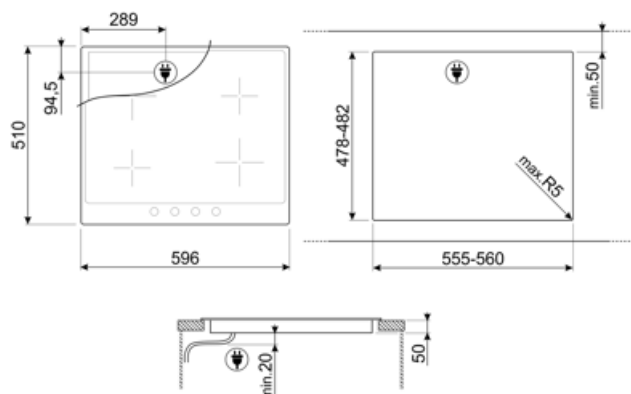

Compatible Accessories

5MP3MB



LGCN



Connecting Strip Built-in hobs, stainless steel, 475/495 mm

TPKPLATE



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

GRILLPLATE













Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

SCRP



Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

| | | | |
|--|--|---|---|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |  | Standard installation: Traditional installation in tabletop, suitable for any kitchen sets |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | Knobs control |
|  | CUT_OUT_STANDARD_72dpi |  | ECO-logic: option allows you to restrict the power limit of the appliance real energy saving. |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |
|  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |

Benefit (TT)

Induction hobs

Fast cooking and precise temperature control

Inox

Maximum resistance even at high temperatures: the stainless steel surface ensures durability and deformation resistance, withstanding thermal shocks without damage

Accurate power adjustment via knobs, for more precise cooking level control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Energy consumption optimization with Eco-Logic Advance, allowing absorption limitation from 2.4 kW in 0.1 kW steps

Nine power levels and Boost function for optimal cooking performance