

SI3842B





Product Family

Built-in Ultra-low profile

Hob

Dimensions80 cmPower supplyElectricTypeInduction

EAN code 8017709161439



Aesthetics



AestheticsUniversalColourBlackFinishingGlassMaterialGlassGlass TypeCeramicGlass edgeAngled edgeType of control settingTouch control

Slider Red
Control knobs position Front
Serigraphy colour Grey

Program / Functions



No. of induction cook zones 4
No. of cooking zones with booster 4
Main on/off switch Yes
Power levels 9
Total no. of cook zones 4

Options













Flexible Zone Type

Bridge



Standard cut out 480x730 mm End of cooking acoustic

Yes alarm End cooking timer 4

> Residual time indicator Yes Control Lock / Child Yes

Safety

Bridge option Yes

Technical Features





Minute minder





Front left - Induction - giant - 2.60 kW - Booster 3.70 kW - Ø 28.0 cm

1

Rear left - Induction - single - 1.40 kW - Booster 2.20 kW - Ø 14.5 cm

Rear right - Induction - single - 1.80 kW - Booster 3.00 kW - Ø 18.0 cm

Front right - Induction - single - 1.80 kW - Booster 3.00 kW - Ø 18.0 cm

Automatic switch off **Automatic** setting Yes Yes according to pan when overflow dimension

Residual heat indicator Yes Automatic pan Yes **Protection against** Yes detection accidental start up

Minimum pan diameter Yes

indication

Automatic switch off Yes


when overheat

Electrical Connection

Nominal power (W) 7400 W Type of electric cable Single and Double phase 50/60 Hz Current 33 A Frequency (Hz) Voltage (V) 220-240 V Power supply cable 150 cm

length Voltage 2 (V) 380-415 V

Terminal Box 6 poles

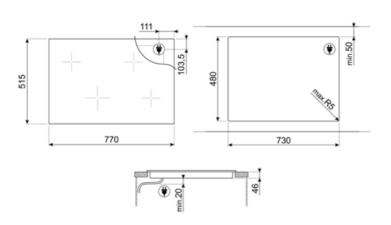



Compatible Accessories




SCRP

Induction and ceramic hobs and teppanyaki scraper



TPK





Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Giant zone: The giant zone offers extra space and flexibility.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



TWIN_ZONE_72dpi



Touch control



Benefit

Induction hobs

Fast cooking and precise temperature control thanks to powerful induction technology

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

Ceramic

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Nine power levels and Boost function for optimal cooking performance

Large surface created by merging two adjacent zones, ideal for large dishes

Bridge Flexible Zone