


SI4642B





Product Family Hob
Built-in Traditional
Dimensions 60 cm
Power supply Electric
Type Induction

EAN code 8017709288167



Aesthetics





AestheticsUniversalColourBlackFinishingGlassMaterialGlassGlass TypeCeramicGlass edgeAngled edgeType of control settingVTC controls

Slider Yes
Slider Red
Control knobs position Front
Logo Silk screen
Serigraphy colour Grey

Program / Functions



No. of induction cook zones

Time-setting options Automatic switch-off

No. of cooking zones with booster4Main on/off switchYesPower levels9Total no. of cook zones4

Options













Yes



Standard cut out Keep warm automatic

function

End cooking timer 1 Pause option Yes Minute minder 1

End of cooking acoustic alarm

478-482x555-560 mm

Yes

Limited Power Consumption Mode

Limited Power Consumption Mode in W

2400, 2800, 3500, 4000, 4500, 5000, 5500, 6000,

7400 W

Yes advance

Control Lock / Child

Residual time indicator

Safety

Rapid level selection

Yes

Yes

Yes

Yes

Technical Features











Front left - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm Rear left - Induction - single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

Yes

Rear right - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm Front right - Induction - single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

Yes, min 7 cm

Automatic setting according to pan

dimension

Automatic pan

detection

Permanent Automatic Yes

Pot Detection with indication of the relative

control

Minimum pan diameter Yes

indication

Automatic switch off

when overheat

Residual heat indicator Yes **Protection against** Yes

accidental start up

Electrical Connection

Nominal power (W) 7400 W

Current 33 A

220-240 V Voltage (V) Voltage 2 (V) 380-415 V Type of electric cable Single phase Type of electric cable

Yes, Double and Three

Phase

Frequency (Hz) Power supply cable


length

Terminal Box

50/60 Hz 120 cm

6 poles



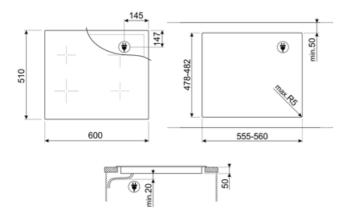



Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper



TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary



Permanent auto pot detection



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



CUT_OUT_STANDARD_72dpi



Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



PAUSE_72dpi



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



...



Possibility to set the maximum power absorbion of the hob



Compact Slider intuitive and easy to use