

SI4642B





Product Family

Built-in

Dimensions

60 cm

Power supply

Type

Induction

EAN code 8017709288167



Aesthetics





AestheticsUniversalColourBlackFinishingGlassMaterialGlassGlass TypeCeramicGlass edgeAngled edgeType of control settingVTC controls

SliderYesSliderRedControl knobs positionFrontSerigraphy colourGrey

Programs / Functions



Total no. of cook zones 4
No. of induction cook zones 4

Time-setting options Automatic switch-off

No. of cooking zones with booster 4

Main on/off switch Yes

Power levels 9

Options













Yes





Standard cut out

Keep warm automatic

function

End cooking timer 1 Pause option Yes Minute minder 1 End of cooking acoustic Yes

alarm

478-482x555-560 mm

Residual time indicator Limited Power

Consumption Mode

2400, 2800, 3500, 4000, **Limited Power** Consumption Mode in W 4500, 5000, 5500, 6000,

7400 W

Yes advance

Control Lock / Child

Safety

Rapid level selection

Yes

Yes

Yes

Yes

Technical Features









Front left - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Rear left - Induction - single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm Rear right - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Front right - Induction - single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

Yes

Automatic setting according to pan

dimension

Automatic pan Yes, min 7 cm

detection

Permanent Automatic Yes

Pot Detection with indication of the relative

control

Minimum pan diameter Yes

indication

Automatic switch off

when overheat

Residual heat indicator Yes **Protection against** Yes

accidental start up

Electrical Connection

Nominal power (W) 7400 W

Current 33 A

220-240 V Voltage (V) Voltage 2 (V) 380-415 V Type of electric cable Single phase Type of electric cable Yes, Double and Three

Phase

Frequency (Hz) Power supply cable

length


Terminal Box

50/60 Hz

120 cm

6 poles



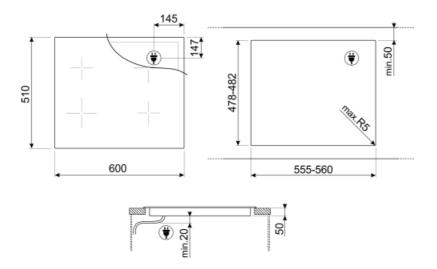



Not included accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper



TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



CUT_OUT_STANDARD_72dpi



Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



PAUSE_72dpi



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



) -





Compact Slider intuitive and easy to use

...