

SI4642B



Product Family

Built-in	Traditional
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709288167


Hob

Traditional

60 cm

Electric

Induction

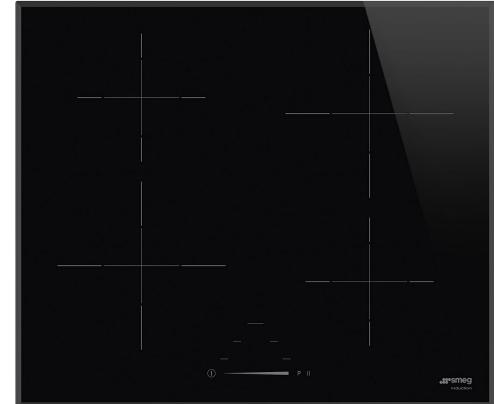

Aesthetics



Aesthetics

Colour	Universal
Finishing	Black
Material	Glass
Glass Type	Glass
Glass edge	Ceramic
Type of control setting	Angled edge
Slider	VTC controls
Slider	Yes
Control knobs position	Red
Logo	Front
Serigraphy colour	Silk screen
	Grey

Program / Functions



No. of induction cook zones	4
Time-setting options	Automatic switch-off
No. of cooking zones with booster	4
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options



Standard cut out	478-482x555-560 mm	Residual time indicator	Yes
Keep warm automatic function	Yes	Limited Power Consumption Mode	Yes advance
End cooking timer	1	Limited Power Consumption Mode in W	2400, 2800, 3500, 4000, 4500, 5000, 5500, 6000, 7400 W
Pause option	Yes	Control Lock / Child Safety	Yes
Minute minder	1	Rapid level selection	Yes
End of cooking acoustic alarm	Yes		

Technical Features



Front left - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Rear left - Induction - single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm


Rear right - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Front right - Induction - single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

Automatic setting according to pan dimension	Yes	Automatic switch off when overheat	Yes
Automatic pan detection	Yes, min 7 cm	Residual heat indicator	Yes
Permanent Automatic Pot Detection with indication of the relative control	Yes	Protection against accidental start up	Yes
Minimum pan diameter indication	Yes		

Electrical Connection

Nominal power (W)	7400 W	Type of electric cable	Yes, Double and Three Phase
Current	33 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	120 cm
Voltage 2 (V)	380-415 V	Terminal Box	6 poles
Type of electric cable	Single phase	Plug	No

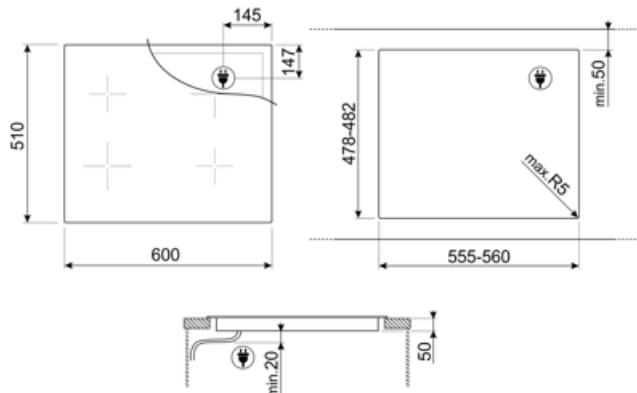

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

	Permanent auto pot detection		Power booster: option allows the zone to work at full power when very intense cooking is necessary.
	Standard installation: Traditional installation in tabletop, suitable for any kitchen sets		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	The slider control panel allows you to adjust the power simply by passing your finger across the touch device.		CUT_OUT_STANDARD_72dpi
	Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.		PAUSE_72dpi
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 °C, the indicator goes out.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	...		Possibility to set the maximum power absorption of the hob
	Compact Slider intuitive and easy to use		