


SI4642B





Product Family Hob
Built-in type Traditional
Dimensions 60 cm
Power supply Electric
Type Induction

EAN code 8017709288167



Aesthetics





AestheticUniversaleColourBlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeAngled edgeType of control settingCompact Slider

Slider Yes
LED colours Red
Control knob position Front
Logo Serigraphy colour Grey

Program / Functions



No. of induction cook zones

Time-setting options Spegnimento automatico

No. of cooking zones with booster4Main on/off switchYesPower levels9Total no. of cook zones4

Options













Yes





Worktop Cut-Out

Keep warm automatic

function

End cooking timer 1 Pause option Yes Minute minder 1 End of cooking alarm Yes

478-482x555-560 mm

Limited Power

Consumption Mode

Residual time indicator

2400, 2800, 3500, 4000, **Limited Power** Consumption Mode in W 4500, 5000, 5500, 6000,

7400 W

Yes

Yes

Yes, Double and Three

Phase

50/60 Hz

120 cm

Si Advance

Yes

Control Lock / Child

Safety

Rapid level selection Yes

Technical Features











Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm Rear-left - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm Front-right - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

Yes

Yes

Yes

Automatic setting

according to pan

dimension

pan detection Yes, min. 7 cm

Permanent Automatic Pot Detection with

indication of the relative

control

Minimum pan diameter

indication

Automatic switch off

when overheat

Residual heat indicator Yes **Protection against** Yes

accidental start up

Electrical Connection

Electrical connection

rating (W)

Current 33 A Voltage (V) 220-240 V Voltage 2 (V) 380-415 V

Type of electric cable

installed

7400 W

Yes, Single phase

Additional connection

modalities


Frequency (Hz) Power supply cable

length

Terminal box

6 poles Plug Not present



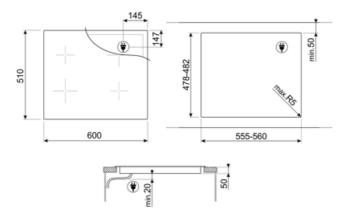



Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs





Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary

ı	1	_	٩		1
ı	(٠)	3	
ľ	0	_	4	ı),	
н		w	-	"	1

Permanent auto pot detection



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets.



Compact Slider intuitive and easy to use



CUT_OUT_STANDARD_72dpi



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Min diameter pot detection of 7 cm



Possibility to set the maximum power absorbion of the hob



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



This function allows you to keep cooked food warm without burner it



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Time elapsed: shows how long the cooking zone has been in use.