

SI4642D




Product Family

Built-in type Ultra-low profile or Fully Flushed

Hob

Dimensions60 cmPower supplyElectricTypeInduction

EAN code 8017709287092



Aesthetics





AestheticUniversaleColourBlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeStraight edgeType of control settingCompact Slider

Slider Yes
LED colours Red
Control knob position Front
Logo Silk screen
Serigraphy colour Grey

Program / Functions



No. of induction cook zones

Time-setting options Spegnimento automatico

No. of cooking zones with booster4Main on/off switchYesPower levels9Total no. of cook zones4

Options













Yes





Worktop Cut-Out

Keep warm automatic

function

End cooking timer 1 Pause option Yes Minute minder 1 End of cooking alarm Yes

478-482x555-560 mm Residual time indicator

Limited Power

Consumption Mode

2400, 2800, 3500, 4000, **Limited Power** Consumption Mode in W 4500, 5000, 5500, 6000,

7400 W

Yes

Yes

Si Advance

Yes

Control Lock / Child

Safety

Rapid level selection Yes

Technical Features









Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm Rear-left - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm Front-right - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

Yes

Yes

Yes

Automatic setting according to pan

dimension

pan detection Yes, min. 7 cm

Permanent Automatic Pot Detection with indication of the relative

control

Minimum pan diameter

indication

Automatic switch off

when overheat

Residual heat indicator Yes **Protection against** Yes

Additional connection

Power supply cable

accidental start up

Electrical Connection

Electrical connection

rating (W)

Current 33 A Voltage (V) 220-240 V Voltage 2 (V) 380-415 V Type of electric cable

installed

7400 W

Yes, Single phase

length

modalities

Terminal box

Plug

Frequency (Hz)


Yes, Double and Three

Phase 50/60 Hz

120 cm

6 poles Not present



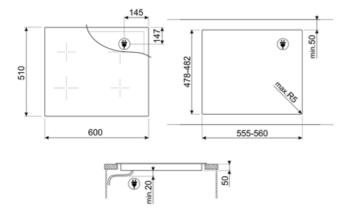



Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary

1	1		⋖	١.	1
ı	(٠	0	Ь	J
ı	ð.		,	a)	Н
1	~	2	G	2)	1

Permanent auto pot detection



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Compact Slider intuitive and easy to use



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



CUT_OUT_STANDARD_72dpi



This function allows you to keep cooked food warm without burner it



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Min diameter pot detection of 7 cm



Possibility to set the maximum power absorbion of the hob