


SI5322B



Product Family

| | |
|--------------|-------------------|
| Built-in | Hob |
| Dimensions | Ultra-low profile |
| Power supply | 30 cm |
| Type | Electric |
| EAN code | Induction |
| | 8017709193386 |

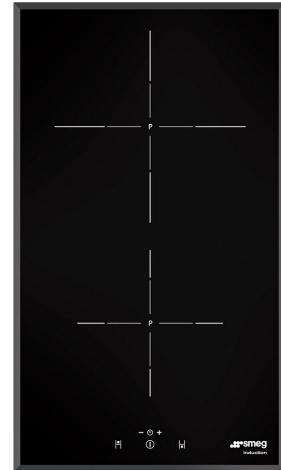

Aesthetics



Aesthetics

| | |
|-------------------------|-------------|
| Colour | Universal |
| Finishing | Black |
| Material | Glass |
| Glass Type | Glass |
| Glass edge | Ceramic |
| Type of control setting | Angled edge |
| Slider | Digi Touch |
| Control knobs position | Red |
| Logo | Front |
| Serigraphy colour | Silk screen |
| | Grey |

Program / Functions



| | |
|-----------------------------------|-----|
| No. of induction cook zones | 2 |
| No. of cooking zones with booster | 2 |
| Main on/off switch | Yes |
| Power levels | 9 |
| Total no. of cook zones | 2 |

Options



| | | | |
|--------------------------------------|------------|------------------------------------|-----|
| Standard cut out | 490x270 mm | Residual time indicator | Yes |
| End cooking timer | 2 | Control Lock / Child Safety | Yes |
| Minute minder | 1 | Quick start | Yes |
| End of cooking acoustic alarm | Yes | | |

Technical Features




Front centre - Induction - single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm

Rear centre - Induction - single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

| | | | |
|---|-----|---|-----|
| Automatic setting according to pan dimension | Yes | Automatic switch off when overheat | Yes |
| Automatic pan detection | Yes | Residual heat indicator | Yes |
| Minimum pan diameter indication | Yes | Protection against accidental start up | Yes |

Electrical Connection

| | | | |
|-------------------------------|--------------|----------------------------------|----------|
| Nominal power (W) | 3500 W | Frequency (Hz) | 50/60 Hz |
| Current | 16 A | Power supply cable length | 120 cm |
| Voltage (V) | 220-240 V | Plug | No |
| Type of electric cable | Single phase | | |

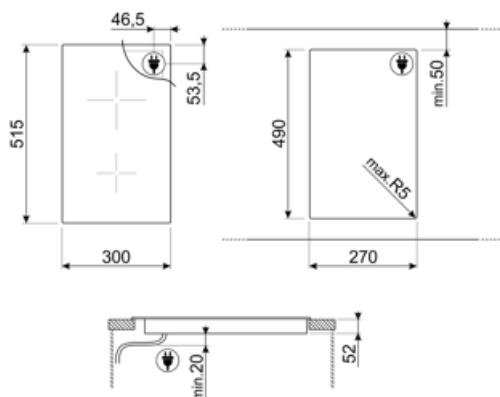

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

| | | | |
|--|---|---|--|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |  | Ultra-low profile: Installation of product with flat edge - height of 1 mm. |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |
|  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Time elapsed: shows how long the cooking zone has been in use. |
|  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |  | Touch control |