

SI5322B



| | |
|----------------|-------------------|
| Product Family | Hob |
| Built-in type | Ultra-low profile |
| Dimensions | 30 cm |
| Power supply | Electric |
| Type | Induction |
| EAN code | 8017709193386 |



Aesthetics



| | |
|-------------------------|-------------|
| Aesthetic | Universale |
| Colour | Black |
| Finishing | Glass |
| Material | Glass |
| Glass type | Ceramic |
| Glass edge | Angled edge |
| Type of control setting | Digi Touch |
| LED colours | Red |
| Control knob position | Front |
| Serigraphy colour | Grey |

Programs / Functions



| | |
|-----------------------------------|-----|
| Total no. of cook zones | 2 |
| No. of induction cook zones | 2 |
| No. of cooking zones with booster | 2 |
| Main on/off switch | Yes |
| Power levels | 9 |


Options



| | | | |
|-----------------|------------|-------------------------|-----|
| Worktop Cut-Out | 490x270 mm | Residual time indicator | Yes |
|-----------------|------------|-------------------------|-----|

| | | | |
|----------------------|-----|-----------------------------|-----|
| End cooking timer | 2 | Control Lock / Child Safety | Yes |
| Minute minder | 1 | Quick start | Yes |
| End of cooking alarm | Yes | | |

Technical Features




Front-centre - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm

Rear-centre - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

| | | | |
|--|-----|--|-----|
| Automatic setting according to pan dimension | Yes | Automatic switch off when overheat | Yes |
| pan detection | Yes | Residual heat indicator | Yes |
| Minimum pan diameter indication | Yes | Protection against accidental start up | Yes |

Electrical Connection

| | | | |
|----------------------------------|-----------|---------------------------------|-------------------|
| Electrical connection rating (W) | 3500 W | Type of electric cable supplied | Yes, Single phase |
| Current | 16 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 120 cm |

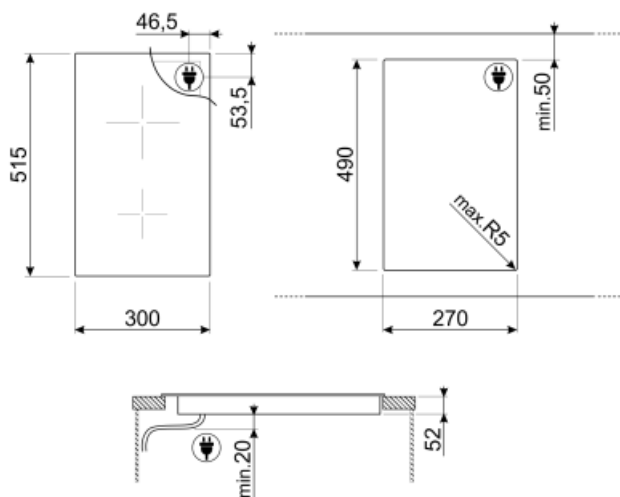

Not included accessories



SCRP











Non-scratch hob scraper - suitable for induction and ceramic hobs



TPK

Stainless steel grill plate to cook Teppanyaki dishes

Symbols glossary (TT)

| | | | |
|--|--|---|---|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |  | Ultra-low profile: Installation of product with flat edge - height of 1 mm. |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | Touch control |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |
|  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Time elapsed: shows how long the cooking zone has been in use. |  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |