


SI5322B



|                |                   |
|----------------|-------------------|
| Product Family | Hob               |
| Built-in type  | Ultra-low profile |
| Dimensions     | 30 cm             |
| Power supply   | Electric          |
| Type           | Induction         |
| EAN code       | 8017709193386     |

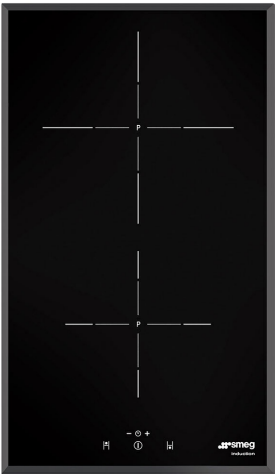

Aesthetics



|                         |             |
|-------------------------|-------------|
| Aesthetic               | Universale  |
| Colour                  | Black       |
| Finishing               | Glass       |
| Material                | Glass       |
| Glass type              | Ceramic     |
| Glass edge              | Angled edge |
| Type of control setting | Digi Touch  |
| LED colours             | Red         |
| Control knob position   | Front       |
| Serigraphy colour       | Grey        |

Program / Functions



|                                   |     |
|-----------------------------------|-----|
| No. of induction cook zones       | 2   |
| No. of cooking zones with booster | 2   |
| Main on/off switch                | Yes |
| Power levels                      | 9   |
| Total no. of cook zones           | 2   |

Options



|                 |            |                         |     |
|-----------------|------------|-------------------------|-----|
| Worktop Cut-Out | 490x270 mm | Residual time indicator | Yes |
|-----------------|------------|-------------------------|-----|

|                      |     |                             |     |
|----------------------|-----|-----------------------------|-----|
| End cooking timer    | 2   | Control Lock / Child Safety | Yes |
| Minute minder        | 1   |                             |     |
| End of cooking alarm | Yes | Quick start                 | Yes |

## Technical Features




Front-centre - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm

Rear-centre - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

|  |     |  |     |
|--|-----|--|-----|
| Automatic setting according to pan dimension | Yes | Automatic switch off when overheat     | Yes |
| pan detection                                | Yes | Residual heat indicator                | Yes |
| Minimum pan diameter indication              | Yes | Protection against accidental start up | Yes |

## Electrical Connection

|                                  |             |                                  |                   |
|----------------------------------|-------------|----------------------------------|-------------------|
| Plug                             | Not present | Type of electric cable installed | Yes, Single phase |
| Electrical connection rating (W) | 3500 W      | Frequency (Hz)                   | 50/60 Hz          |
| Current                          | 16 A        | Power supply cable length        | 120 cm            |
| Voltage (V)                      | 220-240 V   |                                  |                   |

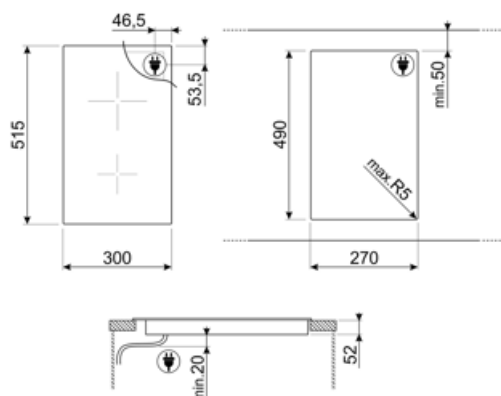

---

## Compatible Accessories

---



### SCRP











Non-scratch hob scraper - suitable for induction and ceramic hobs



### TPK

Stainless steel grill plate to cook Teppanyaki dishes

## Symbols glossary

|  |  |   |   |
|--|--|---|---|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary.  |  | Ultra-low profile: Installation of product with flat edge - height of 1 mm.   |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.                                 |  | Touch control   |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.                            |  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.  |
|  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Time elapsed: shows how long the cooking zone has been in use.   |  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.  |

---

## Benefit (TT)

---

### **Induction hobs**

Fast cooking and precise temperature control

### **Glass**

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

### **Ceramic**

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

### **Control knob position frontal**

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Nine power levels and Boost function for optimal cooking performance