

SI5632D



Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709262976



Aesthetics



Aesthetic	Universal
Colour	Black
Acabamento	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Type of control setting	Touch controls
Comandos Slider	Vermelho
Control knob position	Front
Serigraphy colour	Grey

Program / Functions



No. of induction cook zones	3
No. of cooking zones with booster	3
Main on/off switch	Yes
Power levels	14
Total no. of cook zones	3

Options



Multizone Option	No	Residual time indicator	Yes
------------------	----	-------------------------	-----

Corte padrão	490x560 mm	Limited Power Consumption Mode	Yes
End cooking timer	3	Limited Power Consumption Mode in W	1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000, 6000, 7200 W
Pause option	Yes	Showroom Demo Option	Yes
Minute minder	3	Control Lock / Child Safety	Yes
End of cooking alarm	Yes	Flexi-Heat	No

Technical Features



Front-left - Induction - Single - 2.30 kW - Booster 3.70 kW - Ø 21 cm


Rear-left - Induction - Single - 1.40 kW - Booster 2.50 kW - Ø 14.5 cm

Front-right - Induction - Giant - 1.80 - 2.80 kW - Booster 3.50 - 3.60 kW - Ø 18/28 cm

Automatic setting according to pan dimension	Yes	Residual heat indicator	No
pan detection	Yes	Sensor de calor perfeito	No
Minimum pan diameter indication	Yes	Aquecimento Ecológico	Yes
Automatic switch off when overheat	Yes	Eco-Off	Yes
Automatic switch off when overflow	Yes		

Electrical Connection

Plug	No	Frequency (Hz)	50/60 Hz
Electrical connection rating (W)	7200 W	Comprimento do cabo de alimentação	150 cm
Voltage (V)	220-240 V	Placa de bornes	5 polos
Type of electric cable	Single phase	Ficha elétrica	No

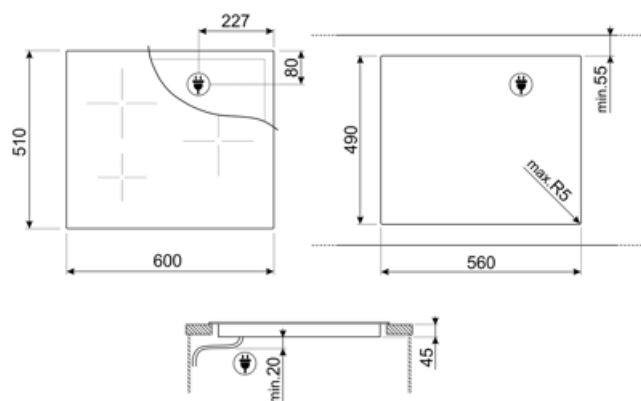

Compatible Accessories



SCRP

Placas de indução e de cerâmica e raspador teppanyaki



TPK

Placa grelhadora de aço inoxidável para cozinhar pratos Teppanyaki

Symbols glossary

	Impulsionador de potência: opção permite que a zona funcione em potência máxima quando é necessário cozinhar muito intensamente.		Bloqueio para crianças: alguns modelos estão equipados com um dispositivo para bloquear o programa/ciclo para que não possa ser acidentalmente alterado.
	Aquecimento Ecológico: esta função avisa quando a zona ainda está quente depois de ser desligada. Além de garantir a máxima segurança, evitando queimaduras, isso também lhe permite fazer uso de calor residual para continuar cozinhando ou manter os alimentos quentes.		ECO-logic: opção permite-lhe restringir o limite de potência da poupança de energia real do aparelho.
	Eco-Off: Esta função de economia de energia desliga a zona antes que o temporizador soe, fazendo uso do calor residual na panela.		Zona gigante: A zona gigante oferece espaço extra e flexibilidade.
	Protecção contra o sobreaquecimento: O sistema de segurança que desliga automaticamente a placa em caso de sobreaquecimento da unidade de controle.		Indução: O trabalho destas placas baseia-se no princípio da indução electromagnética. O calor é gerado diretamente na parte inferior da panela durante o seu contato com a placa.
	Proteção especial contra transbordamento: A proteção especial contra transbordamento desliga o fogão na presença de transbordamento de líquidos.		PAUSE_72dpi
	Tempo decorrido: mostra há quanto tempo a zona de cozedura está em uso.		Temporizador: Todas as placas de cerâmica têm um temporizador que termina automaticamente o cozimento após um tempo predefinido.
	Touch Control		

Benefit (TT)

Induction hobs

Fast cooking and precise temperature control

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

Ceramic

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Energy consumption optimization with Eco-Logic Advance, allowing absorption limitation from 2.4 kW in 0.1 kW steps

Cooking always under control with 14 power levels, ensuring maximum precision