SI5643D1

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709338053

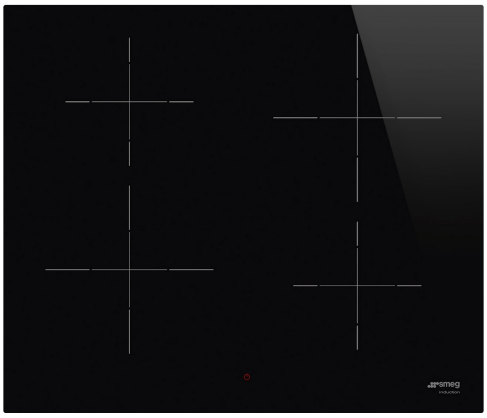

Aesthetics

Aesthetic	Universal
Colour	Black
Acabamento	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Frame	No
Pan Stand Coating	No
Double ceramization	No
Burner Coating	No
Type of control setting	Compact Lite
Slider	Yes
Comandos Slider	Vermelho
Control knob position	Front
Serigraphy colour	Grey
Alternative colours available	No

Program / Functions

No. of induction cook zones	4
Time-setting options	Spegnimento automatico
No. of cooking zones with booster	4
Main on/off switch	Yes
Power levels	9

Ventilação automática 2.0	No
Total no. of cook zones	4

Options

Multizone Option	No	**End of cooking alarm**	Yes
Corte padrão	478-482x555-560 mm	**Residual time indicator**	Yes
Opção de MultiZona	Sim	**Limited Power Consumption Mode**	Sim Adiantamento
Auto-boiling Function	No	**Limited Power Consumption Mode in W**	2400, 2800, 3500, 4000, 4500, 5000, 5500, 6000, 7400 W
Simmering Function	No	**Showroom Demo Option**	No
Keep warm automatic function	Yes	**Control Lock / Child Safety**	Yes
Função de grelha	No	**Bridge option**	No
Melting/Low temperature cooking function	No	**Cleaning option**	No
End cooking timer	1	**Quick start**	No
Pause option	Yes	**Rapid level selection**	Yes
Minute minder	1		

Technical Features

Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm
Rear-left - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm
Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm
Front-right - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

Automatic setting according to pan dimension	Yes	**Automatic switch off when overheat**	Yes
pan detection	Sim, mín. 7 cm	**Automatic switch off when overflow**	No
Detecção Automática Permanente de Pote com indicação do controle relativo	Yes	**Residual heat indicator**	Yes
Minimum pan diameter indication	Yes	**Protection against accidental start up**	Yes

Accessories Included

Other accessories	No

Electrical Connection

Plug	No	**Type of electric cable**	Yes, Double and Three Phase
Electrical connection rating (W)	7400 W		

Current	33 A
Voltage (V)	220-240 V
Voltage 2 (V)	380-415 V
Type of electric cable	Single phase
Type of electric cable supplied	No
Frequency (Hz)	50/60 Hz
Comprimento do cabo de alimentação	120 cm
Placa de bornes	6 polos
Ficha elétrica	No

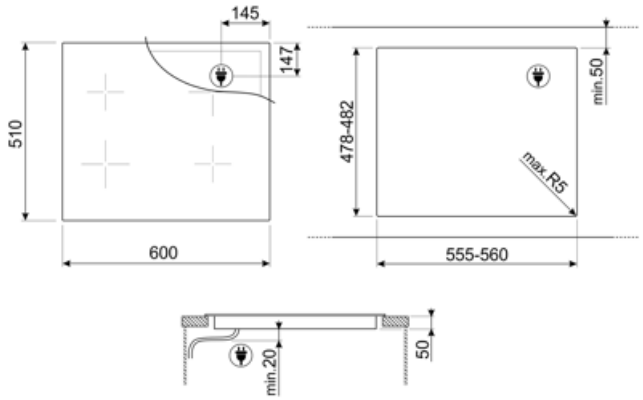

Compatible Accessories

SCRP

Placas de indução e de cerâmica e raspador teppanyaki

TPK

Placa grelhadora de aço inoxidável para cozinhar pratos Teppanyaki

Symbols glossary

Detecção de pote automático permanente

Bloqueio para crianças: alguns modelos estão equipados com um dispositivo para bloquear o programa/ciclo para que não possa ser acidentalmente alterado.

CUT_OUT_STANDARD_72dpi

Mantenha a função quente: Mantenha a função quente mantém o alimento cozido aquecido. Neste modo, a zona de aquecimento funciona a uma capacidade mínima de 120 minutos e, em seguida, desliga-se automaticamente.

Indução: O trabalho destas placas baseia-se no princípio da indução electromagnética. O calor é gerado diretamente na parte inferior da panela durante o seu contato com a placa.

PAUSE_72dpi

Seleção rápida, com um toque de cozimento começa no nível mais alto, em seguida, reduz automaticamente após o tempo. Ideal para pratos que exigem fervura rápida e, em seguida, cozimento contínuo sem controle constante (por exemplo, caldo de carne).

Tempo decorrido: mostra há quanto tempo a zona de cozedura está em uso.

Impulsionador de potência: opção permite que a zona funcione em potência máxima quando é necessário cozinhar muito intensamente.

O painel de controle deslizante permite-lhe ajustar a potência simplesmente passando o dedo pelo dispositivo táctil.

Nível máximo adicional de potência para um melhor consumo de energia

Protecção contra o sobreaquecimento: O sistema de segurança que desliga automaticamente a placa em caso de sobreaquecimento da unidade de controle.

Detecção de pote de diâmetro mínimo de 7 cm

Possibilidade de definir a absorção máxima de potência da placa

Indicação de calor residual: Depois de a placa de cerâmica de vidro ter sido desligada, o indicador de calor residual mostra qual das zonas de aquecimento ainda permanece quente. Quando a temperatura cai abaixo de 60°C, o indicador se apaga.

Temporizador: Todas as placas de cerâmica têm um temporizador que termina automaticamente o cozimento após um tempo predefinido.

Benefit (TT)

Induction hobs

Fast cooking and precise temperature control

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

Ceramic

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Keep Warm function

Dishes always served at the right temperature, even after cooking, thanks to the Keep Warm function

Nine power levels and Boost function for optimal cooking performance

Permanent Automatic Pot Detection with indication of the relative control

Automatic activation of the correct cooking zone with Autopot Detection, recognizing the pot without user intervention