


SI564DUK



Product Family

Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709257415

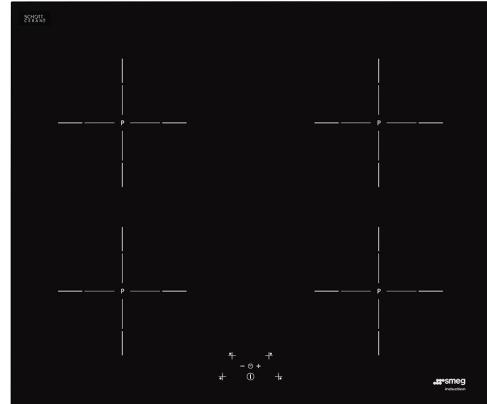

Aesthetics



Aesthetic	Universale
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Type of control setting	Digi Touch
Control knob position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions



No. of induction cook zones	4
No. of cooking zones with booster	4
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options



Worktop Cut-Out

478-482x555-560 mm

End cooking timer	4	Limited Power Consumption Mode	Yes
Minute minder	4		
End of cooking alarm	Yes	Limited Power Consumption Mode in W	3000, 4500 W
Residual time indicator	Yes	Control Lock / Child Safety	Yes
		Rapid level selection	Yes

Technical Features



Front-left - Induction - Single - 1.40 kW - Booster 1.40 kW - Ø 18.0 cm

Rear-left - Induction - Single - 1.40 kW - Booster 1.40 kW - Ø 18.0 cm


Rear-right - Induction - Single - 1.40 kW - Booster 1.40 kW - Ø 18.0 cm

Front-right - Induction - Single - 1.40 kW - Booster 1.40 kW - Ø 18.0 cm

Automatic setting according to pan dimension	Yes	Automatic switch off when overheat	Yes
pan detection	Yes	Residual heat indicator	Yes
Minimum pan diameter	Yes	Protection against accidental start up	Yes

Electrical Connection

Electrical connection rating (W)	3000 W	Frequency (Hz)	50/60 Hz
Current	13 A	Power supply cable length	120 cm
Voltage (V)	220-240 V	Terminal box	6 poles
Type of electric cable installed	Yes, Single phase		

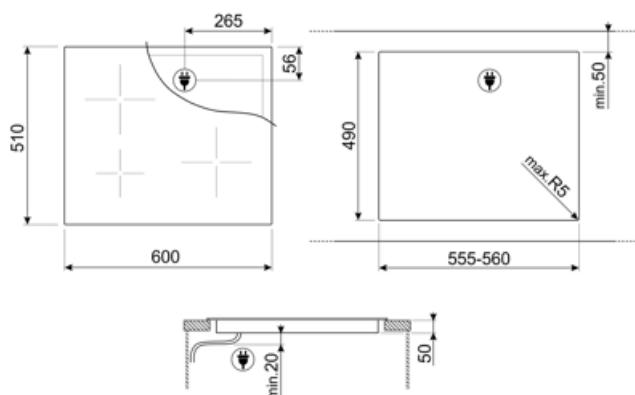

Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	CUT_OUT_STANDARD_72dpi		ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	Touch control		