


SI5743D1



Product Family

Built-in type	Ultra-low profile or Fully Flushed
Dimensions	70/75 cm
Power supply	Electric
Type	Induction
EAN code	8017709338077

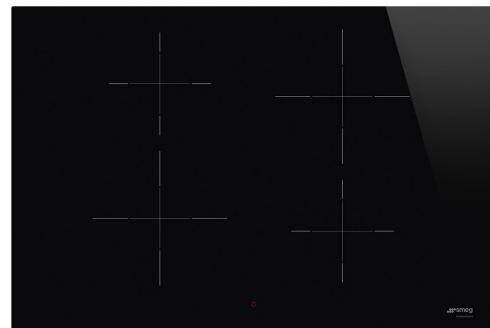

Aesthetics



Aesthetic

Colour	Universale
Finishing	Black
Material	Glass
Glass type	Glass
Glass edge	Ceramic
Type of control setting	Straight edge
Slider	Compact Lite
LED colours	Yes
Control knob position	Red
Logo	Front
Serigraphy colour	Silk screen
	Grey

Program / Functions



No. of induction cook zones	4
Time-setting options	Spegnimento automatico
No. of cooking zones with booster	4
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options



Worktop Cut-Out	478-482x555-560 mm	Residual time indicator	Yes
Double Booster	Yes	Limited Power	Si Advance
Keep warm automatic function	Yes	Consumption Mode	
End cooking timer	4	Limited Power	2400, 2800, 3500, 4000,
Minute minder	4	Consumption Mode in W	4500, 5000, 5500, 6000,
End of cooking alarm	Yes	Control Lock / Child Safety	7400 W
		Rapid level selection	Yes

Technical Features



Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Rear-left - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm


Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Front-right - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

Automatic setting according to pan dimension	Yes	Automatic switch off when overheated	Yes
pan detection	Yes, min. 7 cm	Residual heat indicator	Yes
Permanent Automatic Pot Detection with indication of the relative control	Yes	Protection against accidental start up	Yes
Minimum pan diameter indication	Yes		

Electrical Connection

Electrical connection rating (W)	7400 W	Additional connection modalities	Yes, Double and Three Phase
Current	33 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	120 cm
Voltage 2 (V)	380-415 V	Terminal box	6 poles
Type of electric cable installed	Yes, Single phase	Plug	Not present

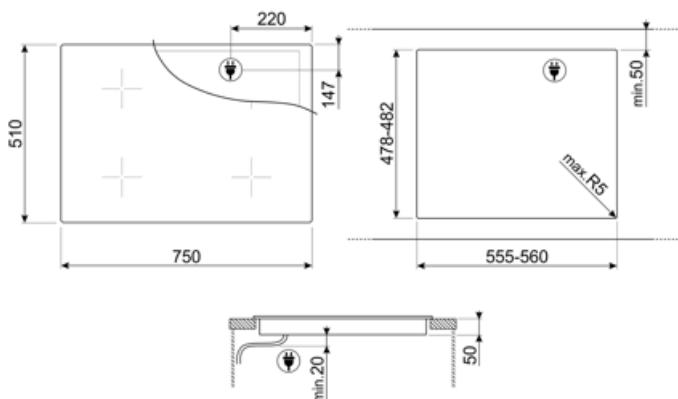

Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

	Permanent auto pot detection		Power booster: option allows the zone to work at full power when very intense cooking is necessary.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		The slider control panel allows you to adjust the power simply by passing your finger across the touch device.
	CUT_OUT_STANDARD_72dpi		This function allows you to keep cooked food warm without burner it
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 °C, the indicator goes out.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	Min diameter pot detection of 7 cm.		Possibility to set the maximum power absorbtion of the hob.
	Additional maximum power level for a better energy consumption		