

SI5743D1



Product Family Hob

Built-in type Ultra-low profile or Fully Flushed

Dimensions70/75 cmPower supplyElectricTypeInduction

EAN code 8017709338077



Aesthetics



AestheticUniversaleColourBlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeStraight edgeType of control settingCompact Lite

SliderYesLED coloursRedControl knob positionFrontSerigraphy colourGrey

Programme / Functions



Total no. of cook zones 4
No. of induction cook zones 4

Time-setting options Spegnimento automatico

No. of cooking zones with booster 4

Main on/off switch Yes

Power levels 9

Options

















Worktop Cut-Out

Double Booster Yes Keep warm automatic Yes

function

End cooking timer 4 Minute minder 4 End of cooking alarm Yes

478-482x555-560 mm Residual time indicator

Limited Power

Consumption Mode

2400, 2800, 3500, 4000, **Limited Power** Consumption Mode in W 4500, 5000, 5500, 6000,

7400 W

Si Advance

Control Lock / Child

Safety

Rapid level selection

Yes

Yes

Yes

Yes

Technical Features











Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm Rear-left - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm

Front-right - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm

Yes

Yes

Yes

Automatic setting

according to pan dimension

pan detection Yes, min 7 cm

Permanent Automatic Pot Detection with indication of the relative

control

Minimum pan diameter

indication

Automatic switch off

when overheat

Residual heat indicator Yes **Protection against** Yes

accidental start up

Electrical Connection

Electrical connection

rating (W)

Current 33 A Voltage (V) 220-240 V Voltage 2 (V) 380-415 V Type of electric cable Yes, Single phase

installed

7400 W

modalities

Additional connection

Frequency (Hz) Power supply cable

length


Terminal box

Yes, Double and Three

Phase 50/60 Hz 120 cm

6 poles



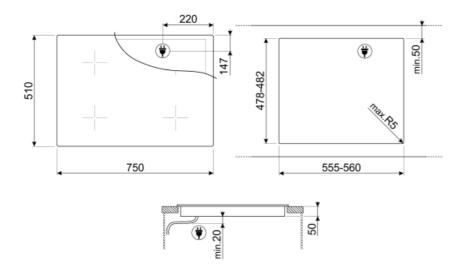



Not included accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary (TT)

1		٦	
ķ	J	J	((
L	V	ಆ	"

Permanent auto pot detection



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.

CUT_OUT_STANDARD_72dpi

This function allows you to keep cooked food warm without burner it

Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.

Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.

Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.

Possibility to set the maximum power absorbion of the hob

P

STOP

°CŦ

14

Power booster: option allows the zone to work at full power when very intense cooking is necessary.

The slider control panel allows you to adjust the power simply by passing your finger across the touch device.

Additional maximum power level for a better energy consumption

Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.

Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).

Time elapsed: shows how long the cooking zone has been in use.

Min diameter pot detection of 7 cm