


SI5743D1



| | |
|-----------------------|------------------------------------|
| Product Family | Hob |
| Built-in type | Ultra-low profile or Fully Flushed |
| Dimensions | 70/75 cm |
| Power supply | Electric |
| Type | Induction |
| EAN code | 8017709338077 |

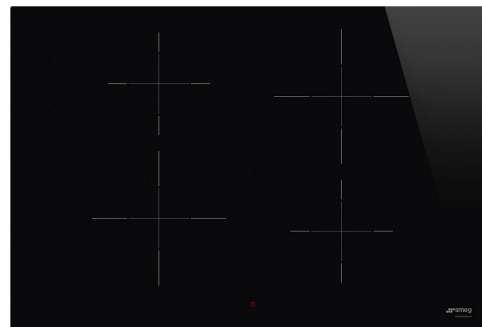

Aesthetics



| | |
|--------------------------------|---------------|
| Aesthetic | Universale |
| Colour | Black |
| Finishing | Glass |
| Material | Glass |
| Glass type | Ceramic |
| Glass edge | Straight edge |
| Type of control setting | Compact Lite |
| Slider | Yes |
| LED colours | Red |
| Control knob position | Front |
| Logo | Silk screen |
| Serigraphy colour | Grey |

Program / Functions



| | |
|------------------------------------------|----------------------|
| No. of induction cook zones | 4 |
| Time-setting options | Automatic switch-off |
| No. of cooking zones with booster | 4 |
| Main on/off switch | Yes |
| Power levels | 9 |
| Total no. of cook zones | 4 |

Options



| | | | |
|-------------------------------------|--------------------|------------------------------------|-------------------------|
| Worktop Cut-Out | 478-482x555-560 mm | Residual time indicator | Yes |
| Double Booster | Yes | Limited Power | Si Advance |
| Keep warm automatic function | Yes | Consumption Mode | |
| End cooking timer | 4 | Limited Power | 2400, 2800, 3500, 4000, |
| Minute minder | 4 | Consumption Mode in W | 4500, 5000, 5500, 6000, |
| End of cooking alarm | Yes | | 7400 W |
| | | Control Lock / Child Safety | Yes |
| | | Rapid level selection | Yes |

Technical Features



| | | | |
|----------------------------------------------------------------------------------|----------------|-----------------------------------------------|-----|
| Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm | | | |
| Rear-left - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm | | | |
| Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm | | | |
| Front-right - Induction - Single - 1.85 kW - Booster 2.10 kW - Ø 16.0 cm | | | |
| Automatic setting according to pan dimension | Yes | Automatic switch off when overheat | Yes |
| pan detection | Yes, min. 7 cm | Residual heat indicator | Yes |
| Permanent Automatic Pot Detection with indication of the relative control | Yes | Protection against accidental start up | Yes |
| Minimum pan diameter indication | Yes | | |

Electrical Connection

| | | | |
|-----------------------------------------|-------------------|-----------------------------------------|-----------------------------|
| Electrical connection rating (W) | 7400 W | Additional connection modalities | Yes, Double and Three Phase |
| Current | 33 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 120 cm |
| Voltage 2 (V) | 380-415 V | Terminal box | 6 poles |
| Type of electric cable installed | Yes, Single phase | Plug | Not present |


















Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

Symbols glossary

| | | | |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Permanent auto pot detection |  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | The slider control panel allows you to adjust the power simply by passing your finger across the touch device. |
|  | CUT_OUT_STANDARD_72dpi |  | This function allows you to keep cooked food warm without burner it |
|  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |
|  | Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth). |  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |
|  | Time elapsed: shows how long the cooking zone has been in use. |  | Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time. |
|  | Min diameter pot detection of 7 cm. |  | Possibility to set the maximum power absorption of the hob. |
|  | Additional maximum power level for a better energy consumption | | |