

SI764AOM



Product Family

| | |
|---------------|---------------|
| Built-in type | Traditional |
| Dimensions | 60 cm |
| Power supply | Electric |
| Type | Induction |
| EAN code | 8017709275846 |



Aesthetics



| | |
|-------------------------------|---------------|
| Aesthetic | Cortina |
| Colour | Anthracite |
| Material | Verniciato |
| Frame | Yes |
| Frame colour | Anthracite |
| Type of control setting | Control knobs |
| LED colours | Red |
| Control knob position | Front |
| No. of controls | 4 |
| Controls colour | Antique brass |
| Components finishing | Antique brass |
| Logo | Silk screen |
| Serigraphy colour | Gold |
| Alternative colours available | Cream |

Program / Functions



| | |
|-----------------------------------|---|
| No. of induction cook zones | 4 |
| No. of cooking zones with booster | 4 |
| Power levels | 9 |
| Total no. of cook zones | 4 |

Options



| | | | |
|--|--------------------------------|------------------------------------|-----|
| Worktop Cut-Out | 478-482x555-560 mm | Control Lock / Child Safety | Yes |
| Limited Power Consumption Mode | Yes | Quick start | Yes |
| Limited Power Consumption Mode in W | 1900, 2600, 3000, 3800, 4500 W | | |

Technical Features




| | | | |
|--|-----|---|-----|
| Front-left - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm | | | |
| Rear-left - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm | | | |
| Rear-right - Induction - Single - 2.30 kW - Booster 3.00 kW - Ø 21.0 cm | | | |
| Front-right - Induction - Single - 1.30 kW - Booster 1.40 kW - Ø 16.0 cm | | | |
| Automatic setting according to pan dimension | Yes | Automatic switch off when overheated | Yes |
| pan detection | Yes | Residual heat indicator | Yes |
| Minimum pan diameter indication | Yes | Protection against accidental start up | Yes |

Accessories included

| | |
|--------------------------|------------------------|
| Other accessories | Colonial control knobs |
|--------------------------|------------------------|

Electrical Connection

| | | | |
|---|-------------------|---|-----------------------------|
| Electrical connection rating (W) | 7400 W | Additional connection modalities | Yes, Double and Three Phase |
| Current | 33 A | Frequency (Hz) | 50/60 Hz |
| Voltage (V) | 220-240 V | Power supply cable length | 120 cm |
| Voltage 2 (V) | 380-415 V | Terminal box | 6 poles |
| Type of electric cable installed | Yes, Single phase | Plug | Not present |

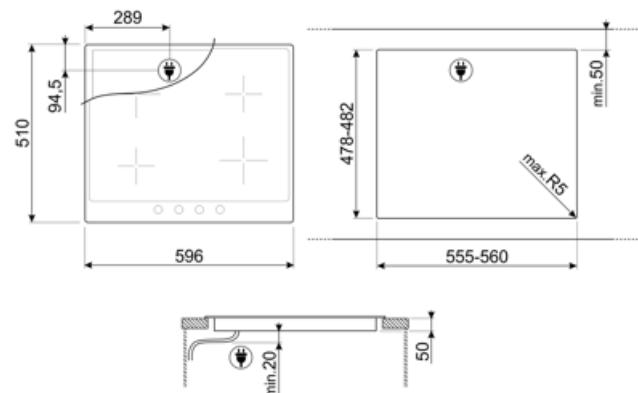

Compatible Accessories



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



LGCN

Connecting Strip Built-in hobs, stainless steel, 475/495 mm



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

Alternative products



SI764POM

Colour: Cream

Symbols glossary

| | | | |
|--|---|---|--|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary. |  | Standard installation: Traditional installation in tabletop, suitable for any kitchen sets. |
|  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |  | CUT_OUT_STANDARD_72dpi |
|  | ECO-logic: option allows you to restrict the power limit of the appliance real energy saving. |  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |
|  | Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob. |  | Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Knobs control |