

# SIA1963DG



## Product Family

Built-in	Ultra-low profile or Fully Flushed
Dimensions	90 cm
Power supply	Electric
Type	Induction
EAN code	8017709328016



## Aesthetics



### Aesthetics

Colour	Neptune Grey
Finishing	Glass
Material	Glass
Glass Type	Ceramic glass
Glass edge	Straight edge
Type of control setting	Vivo Screen Max
Slider	Yes
Slider	TFT
Control knobs position	Front
Logo	Silk screen
Serigraphy colour	Black
Alternative colours available	Black

## Program / Functions



No. of induction cook zones	6
Time-setting options	Automatic switch-off
No. of cooking zones with booster	6
No. of Flexible zones	3
Main on/off switch	Yes
Power levels	17

## Options

---

																				
<b>Multizone Option</b>	Yes										<b>Minute minder</b>	1								
<b>Flexible Zone Type</b>	AreaZone										<b>End of cooking acoustic alarm</b>	Yes								
<b>Standard cut out</b>	500-916 mm										<b>Residual time indicator</b>	Yes								
<b>Follow Pot</b>	Yes										<b>Limited Power Consumption Mode</b>	Yes advance								
<b>Auto-boiling Function</b>	Yes										<b>Limited Power Consumption Mode in W</b>	2400 a 11100 - step 100 W								
<b>Simmering Function</b>	Yes										<b>Show Room Demo Option</b>	Yes								
<b>Keep warm automatic function</b>	Yes										<b>Control Lock / Child Safety</b>	Yes								
<b>Melting/Low temperature cooking function</b>	Yes										<b>Bridge option</b>	Yes								
<b>End cooking timer</b>	6										<b>Quick start</b>	Yes								
<b>Pause option</b>	Yes										<b>Rapid level selection</b>	Yes								

## Technical Features




Central - Induction - Multizone - 2.40 kW - Booster 3.70 kW - 84.0x40.0 cm

<b>Automatic setting according to pan dimension</b>	Yes	<b>Automatic switch off when overflow</b>	Yes
<b>Automatic pan detection</b>	Yes, min 10 cm	<b>Residual heat indicator</b>	Yes
<b>Permanent Automatic Pot Detection with indication of the relative control</b>	Yes	<b>Protection against accidental start up</b>	Yes
<b>Automatic switch off when overheat</b>	Yes		

## Electrical Connection

<b>Nominal power (W)</b>	11100 W	<b>Type of electric cable supplied</b>	Yes, Single and Double phase
<b>Current</b>	49 A	<b>Frequency (Hz)</b>	50/60 Hz
<b>Voltage (V)</b>	220-240 V	<b>Power supply cable length</b>	120 cm
<b>Voltage 2 (V)</b>	380-415 V	<b>Terminal Box</b>	5 poles
<b>Type of electric cable</b>	Three-phase	<b>Plug</b>	No
<b>Type of electric cable</b>	Single and Double phase		

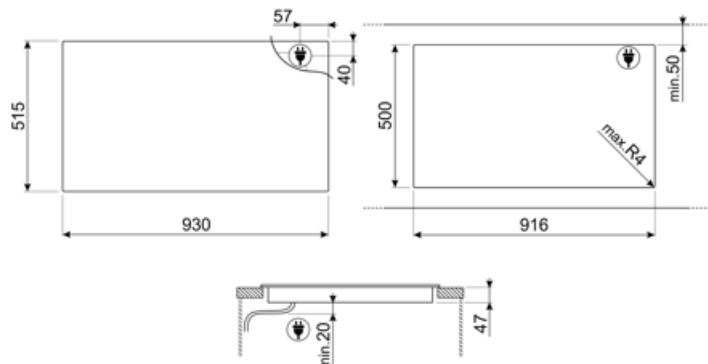

---

## Compatible Accessories

---



### GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



### SCRP

Induction and ceramic hobs and teppanyaki scraper



### TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



---

## Alternative products

---

**SIA1963D**

**Colour: Black**



## Symbols glossary

	Automatic Boiling function: a sensor confirms once the boiling point has been reached and then an acoustic alert signals that the ingredients can be added, saving time and energy.		Power booster: option allows the zone to work at full power when very intense cooking is necessary.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		The slider control panel allows you to adjust the power simply by passing your finger across the touch device.
	Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.		Melting function, suitable for slowly melting delicate foods such as chocolate or butter.
	Overflow protection: The special overflow protection shuts down the stove in the presence of overflow of liquids.		PAUSE_72dpi
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Simmering function: ideal for long-cooking recipes, preventing food from boiling over or sticking to the pan.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	TWIN_ZONE_72dpi		Permanent auto pot detection
	Possibility to set the maximum power absorption of the hob		Possibility to freely move the pot everywhere without turn off the initial settings chosen.
	7 inches TFT touch, high resolution display, true colours		Elegant silver or black glass with under glass serigraphy which allows smoothness, brilliance and no noise to the surface