

# SIA1963DG

**Product familie**

Kookplaat

**Type**

Standaard opbouw of vlakbouw

**Afmeting**

90 cm

**Voeding**

Elektrisch

**Type**

Inductie

**EAN-code**

8017709328016



## Design

**Design**

Linea

**Kleur**

Neptune Grey

**Afwerking**

Glas

**Materiaal**

Glas

**Type glas**

'Glassy' ceramic

**Glazen rand**

Rechte rand

**Double ceramization**

Yes

**Bediening**

VIVOscreen MAX display

**Slider bediening**

Ja

**Kleur LED**

Touch display

**Positie bediening**

Vooraan

**Kleur serigrafie**

Zwart

**Andere beschikbare kleuren**

Zwart

## Program / Functions

**Aantal inductiekookzones**

6

**Opties tijdprogrammering**

Automatische uitschakeling

**Aantal kookzones met booster**

6

**Aantal Multizones**

3

**Hoofdtoets aan/uit**

Ja

**Vermogen niveaus**

17

## Opties

Multizone	Ja										Timer								1	
Flexible Zone Type	AreaZone										Geluidssignaal einde kooktijd								Ja	
Worktop Cut-Out	500-916 mm										Resttijd indicator								Ja	
Auto Multizone	Ja										ECO-Logic optie								Si Advance	
Auto Multizone	Ja										Beperkt vermogensverbruik								2400 à 11100 - step 100	
Water koken	Ja										Showroom demo optie								W	
Sudderden	Ja										Kinderbeveiliging								Ja	
Warmhoudfunctie	Ja										TwinZone optie								Ja	
Smelten/Koken op lage temperatuur	Ja										Quick start								Ja	
Automatische uitschakeling	6										Snelle selectie niveaus								Ja	
Pauze optie	Ja																			

## Technische specificaties




Midden - Inductie - Multizone - 2.40 kW - Booster 3.70 kW - 84.0x40.0 cm

Automatische aanpassing panafmeting	Ja	Automatisch uitschakelen i.g.v. overkoken	Ja
Automatische panherkenning	Ja, minimum 10 cm	Restwarmte indicator	Ja
Permanente automatische pot herkenning met indicatie op de bediening	Ja	Beveiliging tegen accidentele inschakeling	Ja
Automatisch uitschakelen i.g.v. oververhitting	Ja		

## Elektrische aansluiting

Nominale aansluitwaarde	11100 W	Type of electric cable supplied	Yes, Single and Double phase
Stroom	49 A	Frequentie	50/60 Hz
Spanning (V)	220-240 V	Lengte voedingskabel	120 cm
Spanning 2 (V)	380-415 V	Aansluiting	5 polig
Type stroomkabel	Driefasig	Stekker	No
Type stroomkabel	Eenfasig en tweefasig		

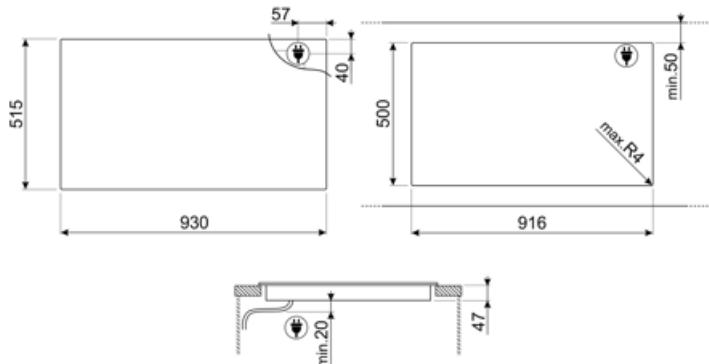

## Compatible Accessories



### GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



### SCRP

Scraper voor inductie- en vitrokeramische kookplaten



### TPK

Inox teppan yaki grillplaat voor inductie



### TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

## Symbols glossary

	Automatic merge of zones for a bigger area		Permanent auto pot detection
	Automatic Boiling function: a sensor confirms once the boiling point has been reached and then an acoustic alert signals that the ingredients can be added, saving time and energy.		Power booster: option allows the zone to work at full power when very intense cooking is necessary.
	Sommige modellen zijn voorzien van een functie om het programma/de cyclus te blokkeren zodat het niet per ongeluk kan aangepast worden.		The slider control panel allows you to adjust the power simply by passing your finger across the touch device.
	This function allows you to keep cooked food warm without burner it		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.		Melting function, suitable for slowly melting delicate foods such as chocolate or butter.
	Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.		7 inches TFT touch, high resolution display, true colours
	All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.		Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).
	Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.		Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.
	Simmering function: ideal for long-cooking recipes, preventing food from boiling over or sticking to the pan.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		TWIN_ZONE_72dpi
	Possibility to set the maximum power absorption of the hob		Possibility to freely move the pot everywhere without turn off the initial settings chosen.
	Elegant silver or black glass with under glass serigraphy which allows smoothness, brilliance and no noise to the surface		



---

## Benefit (TT)

---

### Induction hobs

Fast cooking and precise temperature control

### Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

### Glossy

Elegant aesthetics with Glossy glass, glossy and transparent in a black undertone

### Vivo Screen Max display

Instant visual control with the 7" TFT display, which detects the pot's position, shape, and size for a customized experience

### Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

### Keep Warm function

Dishes always served at the right temperature, even after cooking, thanks to the Keep Warm function

Extreme flexibility with 17 power levels for accurate temperature control

### Automatic boiling function

Automatic boiling at 92°C to simplify preparations that require precision

### Melting/Low temperature cooking function

Delicate ingredients like butter or chocolate can be melted at 44°C in a controlled way

### AreaZone

Free pot positioning thanks to Area technology, which removes fixed cooking zones

### Permanent Automatic Pot Detection with indication of the relative control

Automatic activation of the correct cooking zone with Autopot Detection, recognizing the pot without user intervention

### Follow Pot

Settings remain active even when pots are moved, thanks to the Follow Pot function