

SIA1963DS



Product Family

Built-in type	Ultra-low profile or Fully Flushed
Dimensions	90 cm
Power supply	Electric
Type	Induction
EAN code	8017709304041



Aesthetics



Aesthetic

Colour	Linea
Finishing	Silver
Material	Glass
Glass type	Glass
Glass edge	'Glassy' ceramic
Type of control setting	Straight edge
Slider	Vivo Screen Max
LED colours	Yes
Control knob position	TFT
Logo	Front
Serigraphy colour	Silk screen
Alternative colours available	Grey
	Black

Program / Functions



No. of induction cook zones	6
Time-setting options	Spegnimento automatico
No. of cooking zones with booster	6
Main on/off switch	Yes
Power levels	17

Options

													
Multizone Option	Yes										End of cooking alarm	Yes	
Flexible Zone Type	AreaZone										Residual time indicator	Yes	
Worktop Cut-Out	500-916 mm										Limited Power	Si Advance	
Auto-boiling Function	Yes										Consumption Mode		
Simmering Function	Yes										Limited Power	2400 a 11100 - step 100	
Keep warm automatic function	Yes										Consumption Mode in W	W	
Melting/Low temperature cooking function	Yes										Showroom Demo Option	Yes	
End cooking timer	6										Control Lock / Child Safety	Yes	
Pause option	Yes										Bridge option	Yes	
Minute minder	1										Quick start	Yes	
											Rapid level selection	Yes	

Technical Features




Central - Induction - Multizone - 2.40 kW - Booster 3.70 kW - 84.0x40.0 cm

Automatic setting according to pan dimension	Yes	Automatic switch off when overflow	Yes
pan detection	Yes, min. 10 cm	Residual heat indicator	Yes
Permanent Automatic Pot Detection with indication of the relative control	Yes	Protection against accidental start up	Yes
Automatic switch off when overheat	Yes		

Electrical Connection

Electrical connection rating (W)	11100 W	Type of electric cable supplied	Yes, Single and Double phase
Current	49 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	120 cm
Voltage 2 (V)	380-415 V	Terminal box	5 poles
Type of electric cable installed	Yes, Three-phase	Plug	Not present
Additional connection modalities	Yes, Single and Double phase		

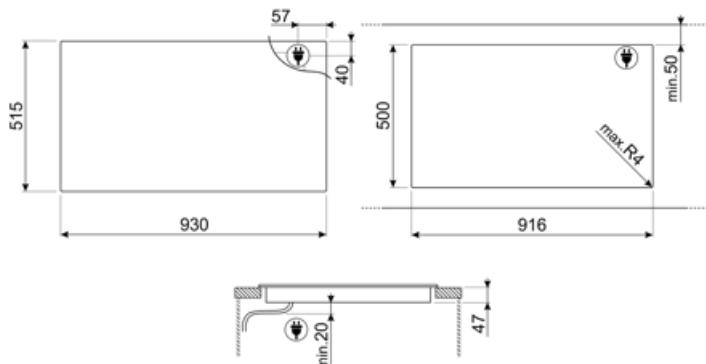

Compatible Accessories



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

Symbols glossary

	Automatic Boiling function: a sensor confirms once the boiling point has been reached and then an acoustic alert signals that the ingredients can be added, saving time and energy.		Power booster: option allows the zone to work at full power when very intense cooking is necessary.
	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		The slider control panel allows you to adjust the power simply by passing your finger across the touch device.
	This function allows you to keep cooked food warm without burner it		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.		Melting function, suitable for slowly melting delicate foods such as chocolate or butter.
	Overflow protection: The special overflow protection shuts down the stove in the presence of overflow of liquids.		All cooking zones can be reduced to the minimum power level, so the hob can be left unattended for a short period without food overcooking or burning. Then just press again this function, the previously set power levels can be reactivated.
	Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).		Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Simmering function: ideal for long-cooking recipes, preventing food from boiling over or sticking to the pan.
	Time elapsed: shows how long the cooking zone has been in use.		Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.
	TWIN_ZONE_72dpi		Permanent auto pot detection
	Possibility to set the maximum power absorption of the hob		7 inches TFT touch, high resolution display, true colours
	Elegant silver or black glass with under glass serigraphy which allows smoothness, brilliance and no noise to the surface		