

SIB2741D



Product Family

Built-in Ultra-low profile or Fully Flushed

Hob

70/75 cm **Dimensions** Power supply Electric Type Induction

8017709326968 EAN code



Aesthetics



Aesthetics Universal Colour Black Glass **Finishing** Material Glass Glass Type Ceramic Glass edge Straight edge Touch control Type of control setting

Slider Red Control knobs position Front Serigraphy colour Grey

Program / Functions



No. of induction cook zones

Automatic switch-off Time-setting options

No. of cooking zones with booster 4 Main on/off switch Yes Power levels 9 Total no. of cook zones 4

Options

















Flexible Zone Type Residual time indicator Yes Bridge

Standard cut out 478-482x555-560 mm **Limited Power** Yes

Consumption Mode End cooking timer 4 Limited Power 1000, 1600, 2200, 2800, Minute minder 1

3500, 6000, 7200 W Consumption Mode in W End of cooking acoustic Yes

Control Lock / Child Yes alarm

Safety

Bridge option Yes

Technical Features

STOP °C∓

Front left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm Rear left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Rear right - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm Front right - Induction - single - 1.70 kW - Booster 2.10 kW - \emptyset 18.0 cm

Booster power left 3.00 kW Minimum pan diameter Yes Multizone indication

Automatic switch off **Booster power right** 3,00 kW Yes

Multizone when overheat

Residual heat indicator Yes **Automatic setting** Yes according to pan **Protection against** Yes dimension

accidental start up Automatic pan Yes, min 9 cm

detection

Electrical Connection


Nominal power (W) 7200 W Type of electric cable Single phase

Current 32 A Type of electric cable Yes, Double and Three Phase

Voltage (V) 220-240 V Frequency (Hz) 50/60 Hz Voltage 2 (V) 380-415 V

Power supply cable 120 cm length



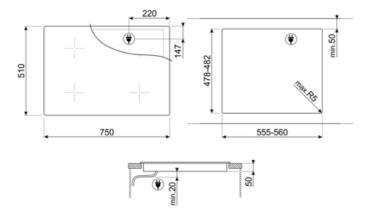



Compatible Accessories

GRILLPLATE



Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

TPKPLATE



Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.



SCRP

Induction and ceramic hobs and teppanyaki scraper



Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



CUT_OUT_STANDARD_72dpi



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



TWIN_ZONE_72dpi



...



Touch control



Benefit

Induction hobs

Fast cooking and precise temperature control thanks to powerful induction technology

Glass

Brightness and elegance in the kitchen: the acid-etched glass gives the surface a refined, modern look that enhances the space.

Ceramic

Stability and design even up to 700°C: the cooktop material resists high temperatures without deforming, maintaining aesthetics and functionality even with intensive use.

Immediate access to functions via touch display, for simple and intuitive control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use.

Energy consumption optimizsation with Eco-Logic Advance, allowing absorption limitation from 2.4 kW in 0.1 kW steps, reducing waste and lowering your electricity usage

Nine power levels and Boost function for optimal cooking performance

Bridge Flexible Zone

Large surface created by merging two adjacent zones, ideal for large dishes