

SIB2741D



Product Family

Built-in	Ultra-low profile or Fully Flushed
Dimensions	70/75 cm
Power supply	Electric
Type	Induction
EAN code	8017709326968



Aesthetics



Aesthetics

Colour	Universal
Finishing	Black
Material	Glass
Glass Type	Glass
Glass edge	Ceramic
Gas_replacement	Straight edge
Type of control setting	Yes
Slider	Digi Touch
Control knobs position	Red
Logo	Front
Serigraphy colour	Silk screen
	Grey

Program / Functions



No. of induction cook zones	4
Time-setting options	Automatic switch-off
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options



Flexible Zone Type	Bridge	Residual time indicator	Yes
Standard cut out	478-482x555-560 mm	Limited Power	Yes
End cooking timer	4	Consumption Mode	
Minute minder	1	Limited Power	1000, 1600, 2200, 2800,
End of cooking acoustic alarm	Yes	Consumption Mode in W	3500, 6000, 7200 W
		Control Lock / Child Safety	Yes
		Bridge option	Yes

Technical Features



Front left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Rear left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm


Rear right - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Front right - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Booster power left	3.00 kW	Minimum pan diameter indication	Yes
Multizone		Automatic switch off when overheated	Yes
Booster power right	3.00 kW	Residual heat indicator	Yes
Multizone		Protection against accidental start up	Yes
Automatic setting according to pan dimension	Yes		
Automatic pan detection	Yes, min 9 cm		

Electrical Connection

Nominal power (W)	7200 W	Type of electric cable	Yes, Double and Three Phase
Current	32 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	120 cm
Voltage 2 (V)	380-415 V	Plug	No
Type of electric cable	Single phase		

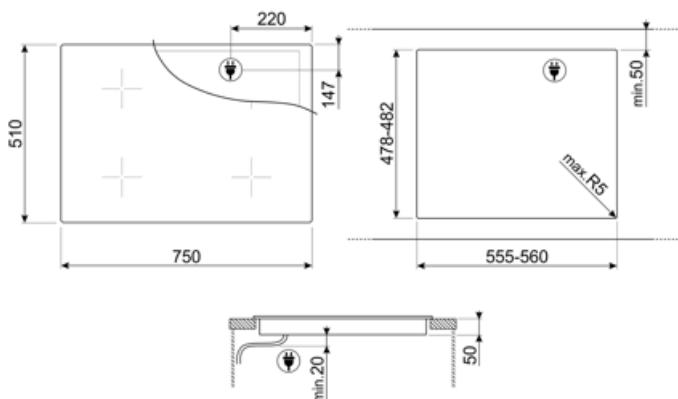

Compatible Accessories



GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



SCRP

Induction and ceramic hobs and teppanyaki scraper



TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

Symbols glossary

 P	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
 DIGI touch	Touch control		CUT_OUT_STANDARD_72dpi
 ECO logic	ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
 Induction	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.		Min diameter pot detection of 9 cm
 H	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
 C	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		TWIN_ZONE_72dpi