

## SIB2741D



### Product Family

Hob

### Built-in type

Ultra-low profile or Fully Flushed

### Dimensions

70/75 cm

### Power supply


Electric

### Type

Induction

### EAN code

8017709326968

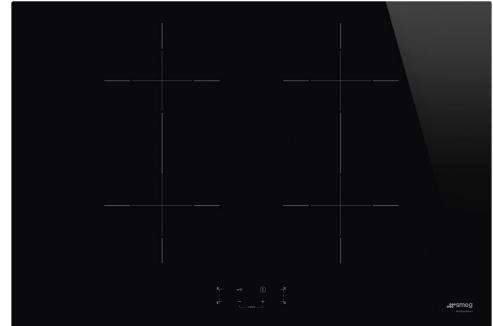

## Aesthetics



### Aesthetic

Universale

### Colour

Black

### Finishing

Glass

### Material

Glass

### Glass type

Ceramic

### Glass edge

Straight edge

### Gas\_replacement

Yes

### Type of control setting

Digi Touch

### LED colours

Red

### Control knob position

Front

### Logo

Silk screen

### Serigraphy colour

Grey

## Program / Functions



### No. of induction cook zones

4

### Time-setting options

Spegnimento automatico

### No. of cooking zones with booster

4

### No. of Flexible zones

2

### Main on/off switch

Yes

### Power levels

9

### Total no. of cook zones

4

## Options



Flexible Zone Type	Bridge	Residual time indicator	Yes
Worktop Cut-Out	478-482x555-560 mm	Limited Power	Yes
End cooking timer	4	Consumption Mode	
Minute minder	1	Limited Power	1000, 1600, 2200, 2800,
End of cooking alarm	Yes	Consumption Mode in W	3500, 6000, 7200 W
		Control Lock / Child Safety	Yes
		Bridge option	Yes

## Technical Features



Front-left - Induction - Single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Rear-left - Induction - Single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm


Rear-right - Induction - Single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Front-right - Induction - Single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Booster power left	3,00 kW	Minimum pan diameter indication	Yes
Bridge		Automatic switch off when overheated	Yes
Booster power right	3,00 kW	Residual heat indicator	Yes
Bridge		Protection against accidental start up	Yes
Automatic setting according to pan dimension	Yes		
pan detection	Yes, min. 9 cm		

## Electrical Connection

Electrical connection rating (W)	7200 W	Additional connection modalities	Yes, Double and Three Phase
Current	32 A	Frequency (Hz)	50/60 Hz
Voltage (V)	220-240 V	Power supply cable length	120 cm
Voltage 2 (V)	380-415 V	Plug	Not present
Type of electric cable installed	Yes, Single phase		

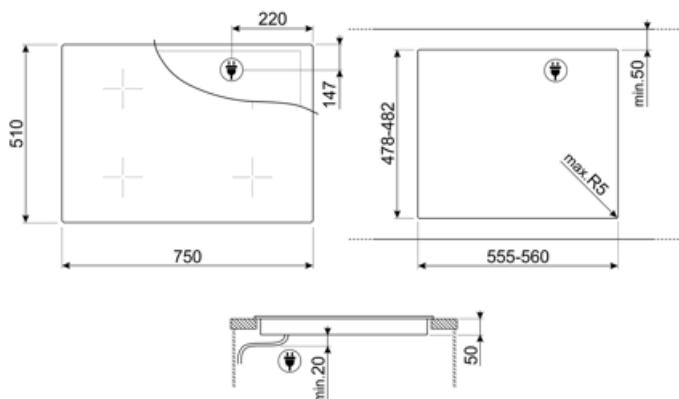

## Compatible Accessories



### GRILLPLATE

Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.



### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



### TPKPLATE

Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.

## Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	CUT_OUT_STANDARD_72dpi		ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.
	Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.		Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		TWIN_ZONE_72dpi
	Min diameter pot detection of 9 cm		Touch control