

# **SIM1644DS**



Product Family Hob

Built-in Ultra-low profile or Fully Flushed

Dimensions60 cmPower supplyElectricTypeInduction

**EAN code** 8017709309688



### **Aesthetics**







AestheticsLineaColourSilverFinishingGlassMaterialGlass

Glass Type Ceramic glass
Glass edge Straight edge
Type of control setting Multi Slider

Slider Yes
Slider White
Control knobs position Front
Serigraphy colour Grey
Alternative colours available Black

# **Program / Functions**





No. of induction cook zones

Time-setting options Automatic switch-off

No. of cooking zones with booster 4

No. of Flexible zones 2

Main on/off switch Yes

Power levels 9


Auto-Vent 2.0 Yes

Total no. of cook zones 4



### **Options**





Standard cut out Auto Multizone

**Double Booster** Keep warm automatic

function

**Grill function** End cooking timer Pause option Yes Minute minder

Yes

Ē

MultiZone

478-482x555-560 mm

(I) Second

Yes

Yes Yes

Yes

End of cooking acoustic

alarm

S 4

Residual time indicator Yes

Yes

Yes

Yes

Yes advance

2400 a 7400 - step 100 W

Limited Power

**Consumption Mode** 

Limited Power

Consumption Mode in W

Show Room Demo

Option

Control Lock / Child

Safety

Bridge option Yes auto Quick start Yes Rapid level selection Yes

### **Technical Features**











Front left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 21.0x19.0 cm

Rear left - Induction - multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 21.0x19.0 cm

Rear right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 21.0x19.0 cm

Front right - Induction - multizone - 2.10 kW - Booster 2.50 kW - Double booster 3 kW - 21.0x19.0 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm Multizone right - Booster 3.70 kW - 38.5x23.0 cm

**Automatic** setting

according to pan dimension

Automatic pan

detection

**Permanent Automatic** 

Pot Detection with indication of the relative

control

Automatic switch off

Yes

when overheat

Yes

Yes, min 9 cm

Yes

Automatic switch off Yes when overflow

Residual heat indicator Yes **Protection against** Yes

accidental start up

## **Electrical Connection**

7400 W Nominal power (W) Current 33 A

Voltage (V) 220-240 V Voltage 2 (V) 380-415 V Type of electric cable

Single phase

Type of electric cable

Yes, Double and Three

Phase 50/60 Hz

Frequency (Hz) Power supply cable


length

**Terminal Box** 

5 poles

120 cm



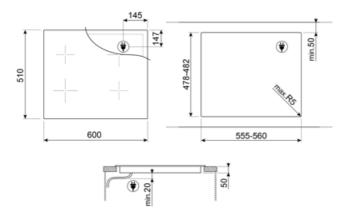



# **Compatible Accessories**

### **GRILLPLATE**



Universal griddle for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking meat, cheese and vegetables. Dimensions: 410 x 240 mm.

#### **TPK**



Stainless steel grill plate to cook Teppanyaki dishes



### **SCRP**

Induction and ceramic hobs and teppanyaki scraper

#### **TPKPLATE**




Universal plate for induction, gas, ceramic and electric hobs. Non-stick surface ideal for cooking fish, eggs and vegetables. Dimensions: 410 X 240 mm.




# Symbols glossary


Symbols glossury			
Ō	Automatic merge of zones for a bigger area	O	
<b>☆</b>		P	Power booster: option allows the zone to work at full power when very intense cooking is necessary.
δ	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.	MULTI slider	Premium individual Slider control for each zone
9	The slider control panel allows you to adjust the power simply by passing your finger across the touch device.	<u>/48 56</u>	CUT_OUT_STANDARD_72dpi
BOOST	Additional maximum power level for a better energy consumption	GLASSY	Elegant silver or black glass with under glass serigraphy which allows smoothness, briliance and no noise to the surface
į		₩	Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.
STOP °C∓	Overheat protection: The safety system that automatically turns off the hob in case of		Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is




overheating of the control unit.









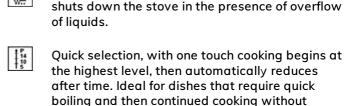

generated directly in the bottom of the pan

Overfill protection: The special overfill protection

during its contact with the hob.

constant control (eg beef broth).

Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.

Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.

WECO logic

..