

SIM1963D



Product Family Hob

Built-in type Ultra-low profile or Fully Flushed

Dimensions90 cmPower supplyElectricTypeInduction

EAN code 8017709288204



Aesthetics







AestheticLineaColourBlackFinishingGlassMaterialGlass

Glass type 'Glassy' ceramic
Glass edge Straight edge
Type of control setting Multi Slider

Slider Yes
Slider White
Control knob position Front
Logo Silk screen
Serigraphy colour Grey

Program / Functions



No. of induction cook zones

Time-setting options Automatic Shutdown

No. of cooking zones with booster6No. of Flexible zones3Main on/off switchYesPower levels9Total no. of cook zones6

Options





















Multizone Option Yes Flexible Zone Type Multi7one Standard cut out 490x880 mm Yes

Keep warm automatic

function **Grill function** Yes 6 End cooking timer Pause option Yes Minute minder End of cooking alarm Yes

Secondary Second

Residual time indicator Yes Limited Power Advanced Eco Logic Consumption Mode

Limited Power 4200, 5000, 6000 W Consumption Mode in W

Showroom Demo Option Yes Control Lock / Child Yes

Safety

si-AUTO Bridge option Quick start Yes Rapid level selection Yes

Technical Features











Front-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Rear-left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Front-centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Regr-centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Front-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Rear-right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm Multizone center - Booster 3.70 kW - 38.5x23.0 cm Multizone right - Booster 3.70 kW - 38.5x23.0 cm

Yes

Yes

Automatic setting according to pan

dimension

pan detection Yes, min 9 cm

Permanent Automatic Yes Pot Detection with indication of the relative

control

Automatic switch off

when overheat

Automatic switch off Yes

when overflow

Residual heat indicator Yes Protection against Yes accidental start up

Electrical Connection

Electrical connection

11100 W

rating (W)

49 A Current Voltage (V) 220-240 V 380-415 V Voltage 2 (V) Type of electric cable Three-phase Type of electric cable

Type of electric cable

supplied

Frequency (Hz) Power supply cable

length

Terminal box


Single and Double phase

Yes, Single and Double

phase 50/60 Hz 120 cm

5 poles



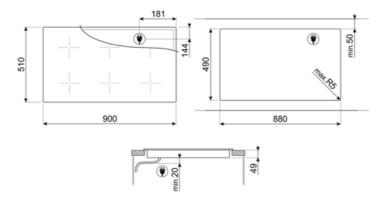



Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper



TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



PAUSE_72dpi



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



.



...



...



Premium individual Slider control for each zone



Elegant silver or black glass with under glass serigraphy which allows smoothness, briliance and no noise to the surface