

SIM1963DS



Product Family Hob

Built-in Ultra-low profile or Fully Flushed

Dimensions 90 cm
Power supply Electric
Type Induction

EAN code 8017709288198



Aesthetics







AestheticsLineaColourSilverFinishingGlassMaterialGlass

Glass Type Ceramic glass
Glass edge Straight edge
Type of control setting Multi Slider

SliderYesSliderWhiteControl knobs positionFrontSerigraphy colourGrey

Programs / Functions



No. of induction cook zones 6

Time-setting options Automatic switch-off

No. of cooking zones with booster 6
No. of Flexible zones 3

Main on/off switchYesPower levels9Total no. of cook zones6

Options



















Flexible Zone Type Standard cut out

Multizone Option

MultiZone 490x880 mm Yes

Keep warm automatic function

Grill function Yes End cooking timer 6 Pause option Yes 1 Yes

Yes

Minute minder End of cooking acoustic alarm

Residual time indicator Yes

Limited Power Yes advance Consumption Mode

4200, 5000, 6000 W **Limited Power** Consumption Mode in W

Show Room Demo Yes

Option Control Lock / Child Yes

Safety

Bridge option Yes auto Quick start Yes Rapid level selection Yes

Technical Features











Front left - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Rear left - Induction - multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Front centre - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Rear centre - Induction - multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm Front right - Induction - Multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Rear right - Induction - multizone - 2.10 kW - Booster 2.50 kW - Double booster 3.00 kW - 24.0x18.0 cm

Multizone left - Booster 3.70 kW - 38.5x23.0 cm

Multizone center - Booster 3.70 kW - 38.5x23.0 cm Multizone right - Booster 3.70 kW - 38.5x23.0 cm

Automatic setting

according to pan

dimension

Automatic pan Yes, min 9 cm

detection

Permanent Automatic Pot Detection with indication of the relative

Automatic switch off

when overheat

Yes

Yes

control

Yes

Automatic switch off

when overflow

Residual heat indicator Yes Protection against Yes

accidental start up

Electrical Connection

Nominal power (W) 11100 W Current 49 A 220-240 V Voltage (V) Voltage 2 (V) 380-415 V


Type of electric cable Frequency (Hz) Power supply cable length

Double universal 50/60 Hz 120 cm

Yes

Terminal Box 5 poles



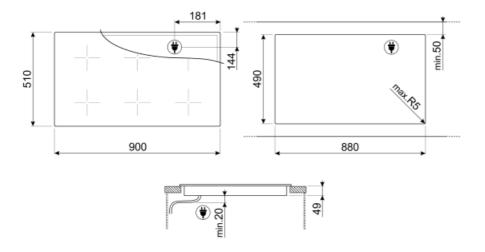



Not included accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper



TPK

Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



The slider control panel allows you to adjust the power simply by passing your finger across the touch device.



Keep warm function: Keep warm function keeps the cooked food heated. In this mode the heating zone operates at a minimum capacity for 120 minutes and then turns off automatically.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Multizone: allows several pans to be used at once, large or small, offering freedom of placement and greater flexibility



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



PAUSE_72dpi



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



..





•••



Elegant silver or black glass with under glass serigraphy which allows smoothness, briliance and no noise to the surface

GLASSY

Premium individual Slider control for each zone